

HDSS-6020

Self Stick Duct Doors, for Sheet Metal Duct

Application

- Provides easy access to sheet metal ducts

Product Features

- Innovative self stick frame for easy installation
- Insulated door panel, single cam, hinged
- Tested to 10" SP with minimal leakage

Options:

- ALUMINUM
- STAINLESS STEEL
- CYLINDER LOCK & KEY
- HASP + STAPLE
- L HANDLE

HDSS-6020 Duct Access Door Specifications:

Door: 24 gauge galvanized steel, double panel

Frame: 24 gauge galvanized steel


Hinge: Continuous aluminum piano hinge

Insulation: Door panel filled with 1" fiberglass insulation

Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame. 1/8" thick by 1 1/2" wide adhesive bonded gasket between frame to duct

Latch: Self tightening, hand operated cam latches

Hardware: Hex head sheet metal screws

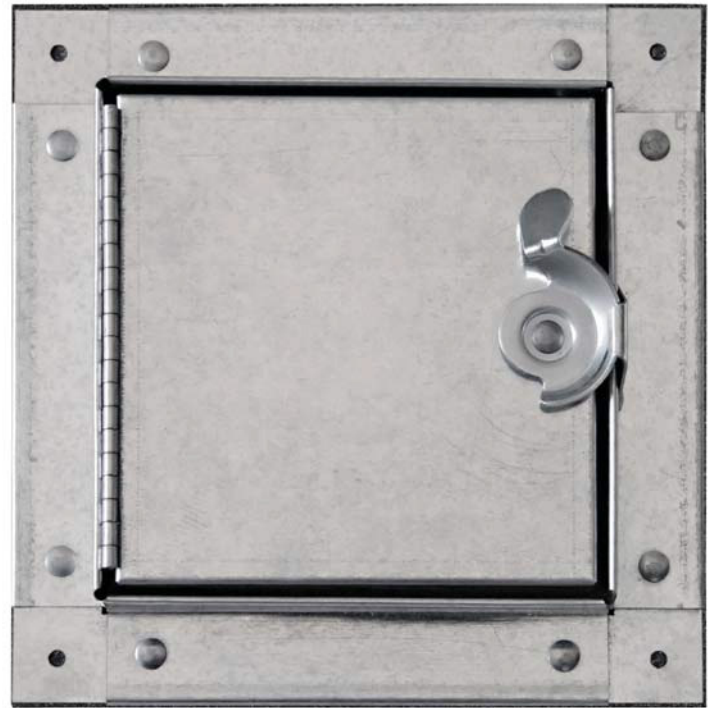

STANDARD SIZES (other sizes available upon request)

| Nominal Door Size W&H | | | | Weight per Door | |
|-----------------------|-----------|--------------|---------|-----------------|-----|
| Inches | mm | Duct Opening | Latches | lbs. | kg. |
| 6 X 6 | 152 X 152 | 4.5 X 4.5 | 2 | 1.5 | 0.7 |
| 8 X 8 | 203 X 203 | 6.5 X 6.5 | 2 | 2.2 | 1.0 |
| 10 X 10 | 254 X 254 | 8.5 X 8.5 | 2 | 3.0 | 1.3 |
| 12 X 12 | 305 X 305 | 10.5 X 10.5 | 2 | 3.8 | 1.7 |
| 14 X 14 | 356 X 356 | 12.5 X 12.5 | 4 | 4.9 | 2.2 |
| 16 X 16 | 406 X 406 | 14.5 X 14.5 | 4 | 6.0 | 2.7 |
| 18 X 18 | 457 X 457 | 16.5 X 16.5 | 4 | 7.0 | 3.2 |
| 20 X 20 | 508 X 508 | 18.5 X 18.5 | 4 | 9.1 | 4.1 |
| 24 X 24 | 610 X 610 | 22.5 X 22.5 | 4 | 11.6 | 5.3 |

