

# RHG GALVANIZED EQUIPMENT ACCESS ROOF HATCH (Double Leaf)

## Application

Acudor Equipment Access Roof Hatches are designed to provide convenient, economical access to the roof of a building where larger openings are required. This opening allows for equipment to be installed or removed from a building through the roof.

## Features RHG

- Weather tight construction
- Convenient one-hand operation
- 12" high insulated curb
- Supports 40lbs./sq. ft. live load
- G90 Galv. Steel
- Stainless Steel Hardware

## Optional Features RHG

- Painted and Anodized finishes
- Polycarbonate domes for daylighting
- Louvered Curbs
- Curb Mounted Units
- Galvanized steel curb and Aluminum cover
- Curb pitch corrected for sloped roof
- Higher curb heights for "green roof" applications
- Available with Galvanized Steel Curb and Aluminum Cover
- Higher Live Load Support



## RHG Specifications:

**Cover:** Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 14 gauge galvanized steel with a 22 gauge galvanized steel inside liner.

**Curb:** 14 gauge galvanized steel with 1" thick Polyiso (R-6) insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes.

**Hinge:** Heavy duty galvanized steel pintle hinges with 3/8" SS pin

**Opening:** Gas spring operators allow cover to open and close with ease.


Stainless Steel Inside pull handle allows for easy control when closing cover.

**Door Latch:** Self latching, Stainless steel outside T handle with stainless steel inside lock and lever assembly. Unit also has inside and outside padlock provisions.

**Finish:** Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel grey paint.

## RHG STANDARD SIZES (other sizes available)

| Model | Curb ID W&L           | Weight per Hatch |
|-------|-----------------------|------------------|
|       | inches (mm)           | lbs. (kg.)       |
| G6868 | 60 x 60 (1524 x 1524) | 290 (131)        |

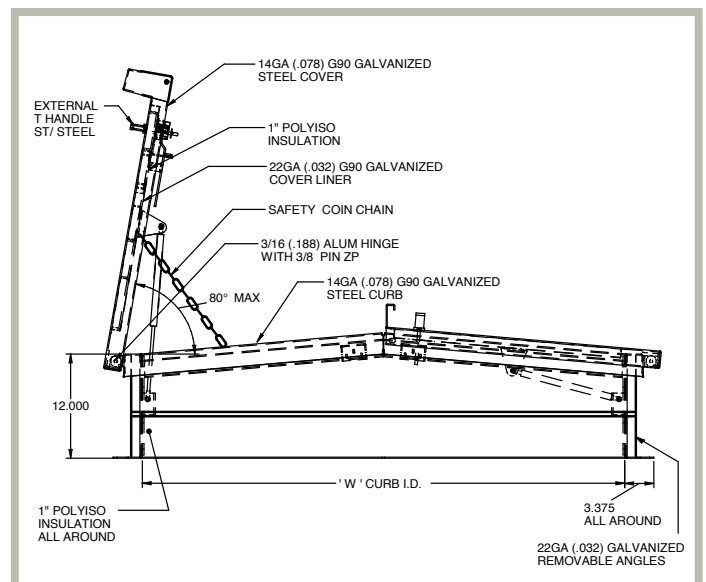

For detailed specifications see submittal sheet