




SUITABLE FOR US (UL rated):

FLEX TYPE	Braided Round PVC + PVC SPT Power Cable
PRODUCT CODE	BOV
WORKING VOLTAGE	300V
WORKING TEMPERATURE	+105°C
SIZE CONDUCTOR [AWG]	3 x 18
CONDUCTOR STRANDING [N° x mm]	48 x 0.15
OUTER DIAMETER [mm]	7.2 ± 0.2
CABLE STANDARDS	UL 62/1581, CSA 22.2
TYPE OF CONDUCTOR	Red copper stranded conductor.
TYPE OF INSULATION	PVC + PVC SVT type insulation.
TYPE	SVT-B HT 105
SHEATH COLOUR	Black or White
TYPE OF COVERING	Viscose rayon or polyester textile braid.
APPLICATION	Flexible jacketed cord.
CORE IDENTIFICATION	3 Core: Black ● White ○ Green ●

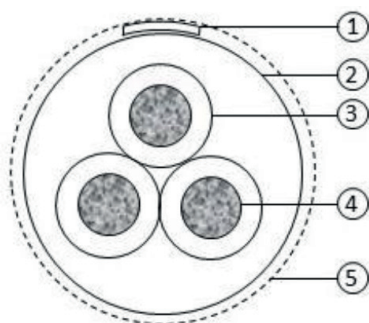

CABLE CONSTRUCTION

1. Marking tape
2. PVC SVT HT 105 insulation
3. PVC insulation
4. Red copper stranded conductor
5. Viscose rayon or polyester textile braid



HECTOR FINCH



COLOUR

Black

Nugget

Elephant

Brown

RECOMENDED FINISH

Bronze

Brass Polished

Nickel Polished

Bronze

Black

Antique Brass

Nickel Matte

Nickel Polished

Chrome

Nickel Matte

Chrome