




**SUITABLE FOR US:**

<b>FLEX TYPE</b>	Braided Flat SPT-1 + Earth PVC Power Cable
<b>PRODUCT CODE</b>	BOV
<b>VOLTAGE RATING</b>	300V
<b>WORKING TEMPERATURE</b>	+105°C
<b>SIZE CONDUCTOR [AWG]</b>	2 x 18 + Earth
<b>CONDUCTOR STRANDING [N° x mm]</b>	48 x 0.15
<b>OUTER DIAMETER [mm]</b>	5.2 x 6.2 ± 0.5
<b>CABLE STANDARDS</b>	UL 62/1581 (PVC SPT-1 Cable only), CSA 22.2 (PVC SPT-1 Cable only)
<b>STRANDING OF CONDUCTOR</b>	Tin-plated copper stranded conductor.
<b>INSULATION</b>	PVC SPT-1 type insulation.
<b>CABLE ASSEMBLY</b>	The cores are parallel.
<b>CORE IDENTIFICATION</b>	2 Core: Black ● + separate bare Earth

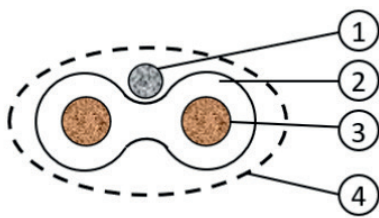

**CABLE CONSTRUCTION**

1. Stranded Earth Wire
2. PVC SPT-1 insulation
3. Class 5 flexible copper conductor
4. Viscose rayon or polyester textile braid



HECTOR FINCH



COLOUR

Black

Nugget

Elephant

Brown

RECOMENDED FINISH

Bronze  
Black  
Nickel Polished  
Nickel Matte  
Chrome

Brass Polished  
Antique Brass

Nickel Polished  
Nickel Matte  
Chrome

Bronze