




REINVENTING THE OCEAN GLIDER

Hefring Engineering is re-imagining one of the most versatile tools in ocean observation and research.



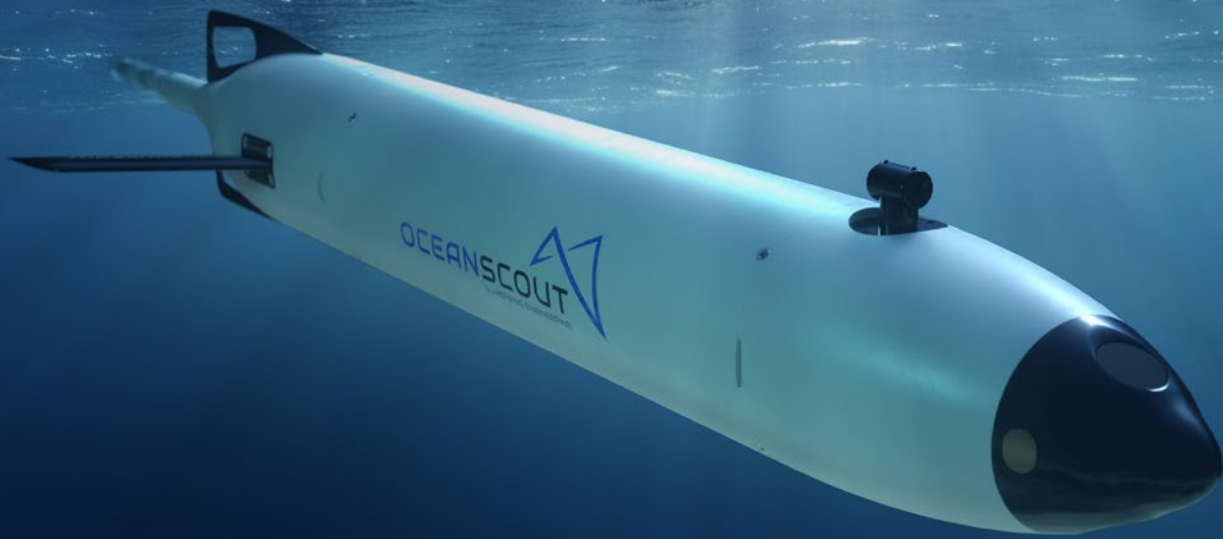

BUILT FOR SCALE


Hefring enables scientists and other stakeholders to view more of the ocean with a scalable, low-cost, autonomous platform. Oceanscout can be handled by one person, making it easy to deploy and recover anywhere in the world. The platform is stealthy with no surface expression through most of the mission and minimal expression when surfacing.


An enterprise level piloting interface expands platform use to non-traditional users and large institutions alike, broadening our collective understanding of the world's oceans.




 Hefring Engineering
417 Main St
Gloucester, MA 01930
USA

 +1 978 296 4301

 info@hefring.com

 hefringengineering.com

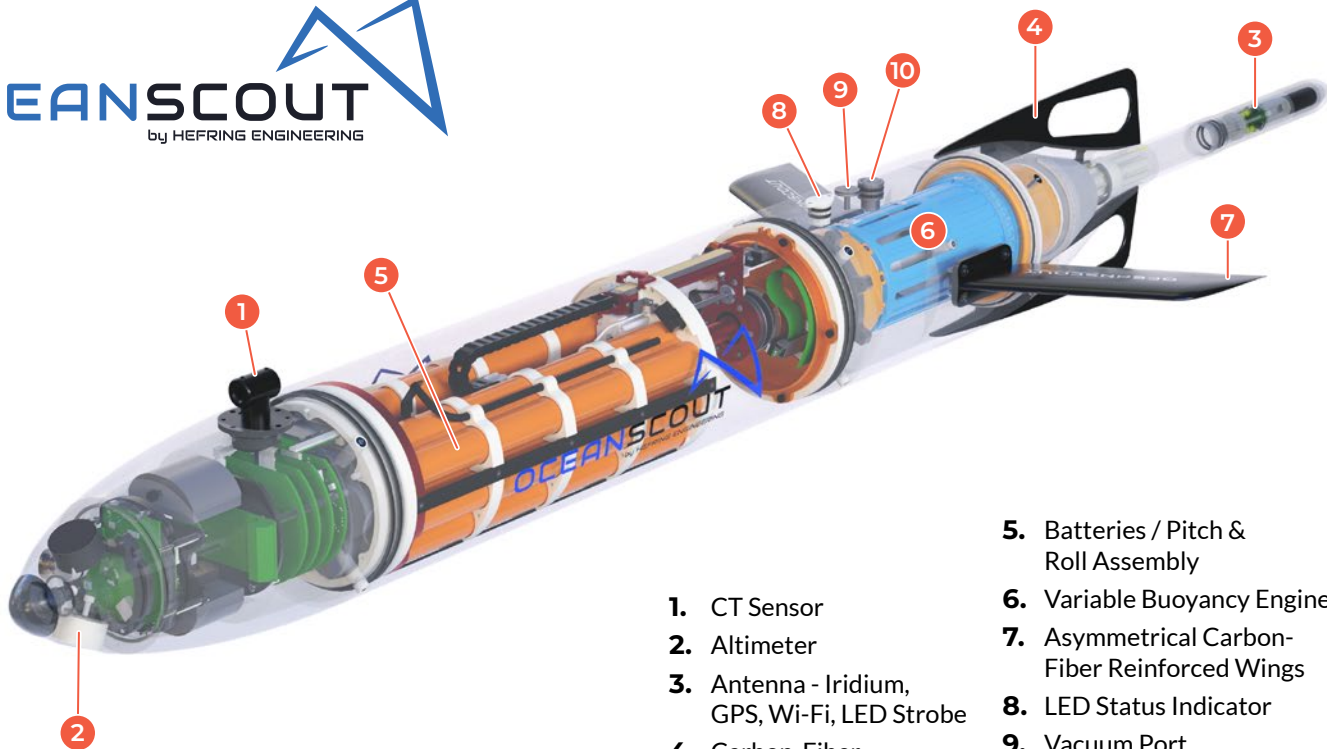

1. CT Sensor
2. Altimeter
3. Antenna - Iridium, GPS, Wi-Fi, LED Strobe
4. Carbon-Fiber Tail Fin Handle
5. Batteries / Pitch & Roll Assembly
6. Variable Buoyancy Engine
7. Asymmetrical Carbon-Fiber Reinforced Wings
8. LED Status Indicator
9. Vacuum Port
10. Pressure Relief Valve

PARAMETERS

Weight	22.5 kg
Hull Diameter	16 cm
Length	1.61 m - 1.75 m
Displacement Volume	21.6 L - 22.4 L
Buoyancy Change Volume	0.75 L

PERFORMANCE

Operational Depth	200 m
Battery Capacity	1.2 kW-hours
Battery Type	Lithium Primary MnO2
Approx. Duration	4-6 months

COMMUNICATIONS

Iridium	Short Burst Data
WiFi	802.11 abg with high gain antenna, Access point and station modes supported
Ethernet	10/100 Mbit/s
LED Strobe	Hi visibility recovery aid
Status Indicators	RGB high intensity LED
GPS	ZOE-M8G

CONTROL

Cloud-Based Piloting Software	Iridium SBD and direct Internet connection
Glider Control Interface	Secure shell over WiFi
Local user application	Downloadable from glider over WiFi/Ethernet

SENSORS

Nortek Altimeter	500 kHz
JFE CT ACTD-OEMU-Z105	<ul style="list-style-type: none"> • Range: -3-45°C, 0.5-70 mS/cm • Resolution: 0.001°C, 0.001 mS/cm • Accuracy: ±0.01°C, ±0.01 mS/cm • Response time (63%): <0.2 s
Keller Pressure Sensor PA-7LH	<ul style="list-style-type: none"> • Accuracy: ±0.50%FS • Long-term stability: ±0.25% FS/year • Range: 0-5 bar to 0-200 bar
Integrated heading and attitude	

INCLUDED ITEMS


- Rugged Glider Shipping Case
- Portable Glider Lab Stand
- Vacuum Valve Kit
- Glider Tool Kit

OPTIONAL EXTRAS

- Full Spares Kit
- Glider Deployment & Recovery Cart
- Vacuum Pump

SERVICES

Support services available. Please inquire.


 Owned, operated, and manufacturing in the USA.

PASSIVE ACOUSTIC MONITORING

Oceanscout-PAM is purpose built for passive acoustic monitoring (PAM) in the ocean. The glider is ideal for these measurements because it offers flexible spatial sampling, minimizes self-noise, and offers near real-time feedback.




MEASUREMENT MODES

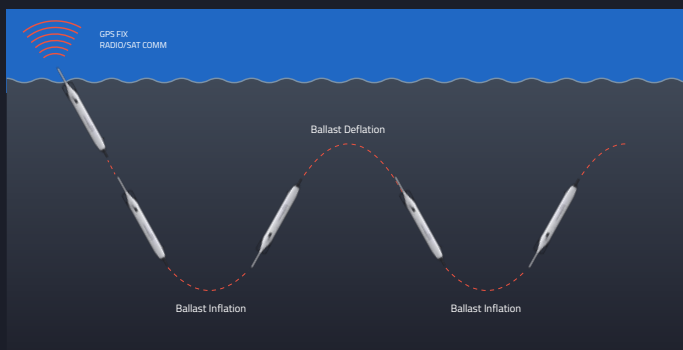


UNDERWAY

Oceanscout-PAM can listen while swimming over a user-defined mission within a programmed area of interest and surface if an anomaly is detected.

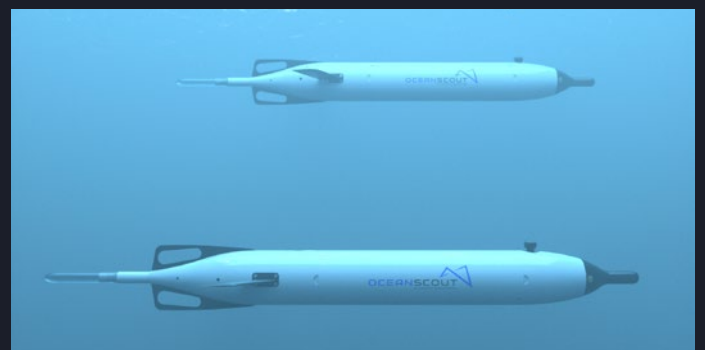


HOVER

Oceanscout-PAM can swim to a waypoint and hover in place at a user-defined depth, then surface if an anomaly is detected.

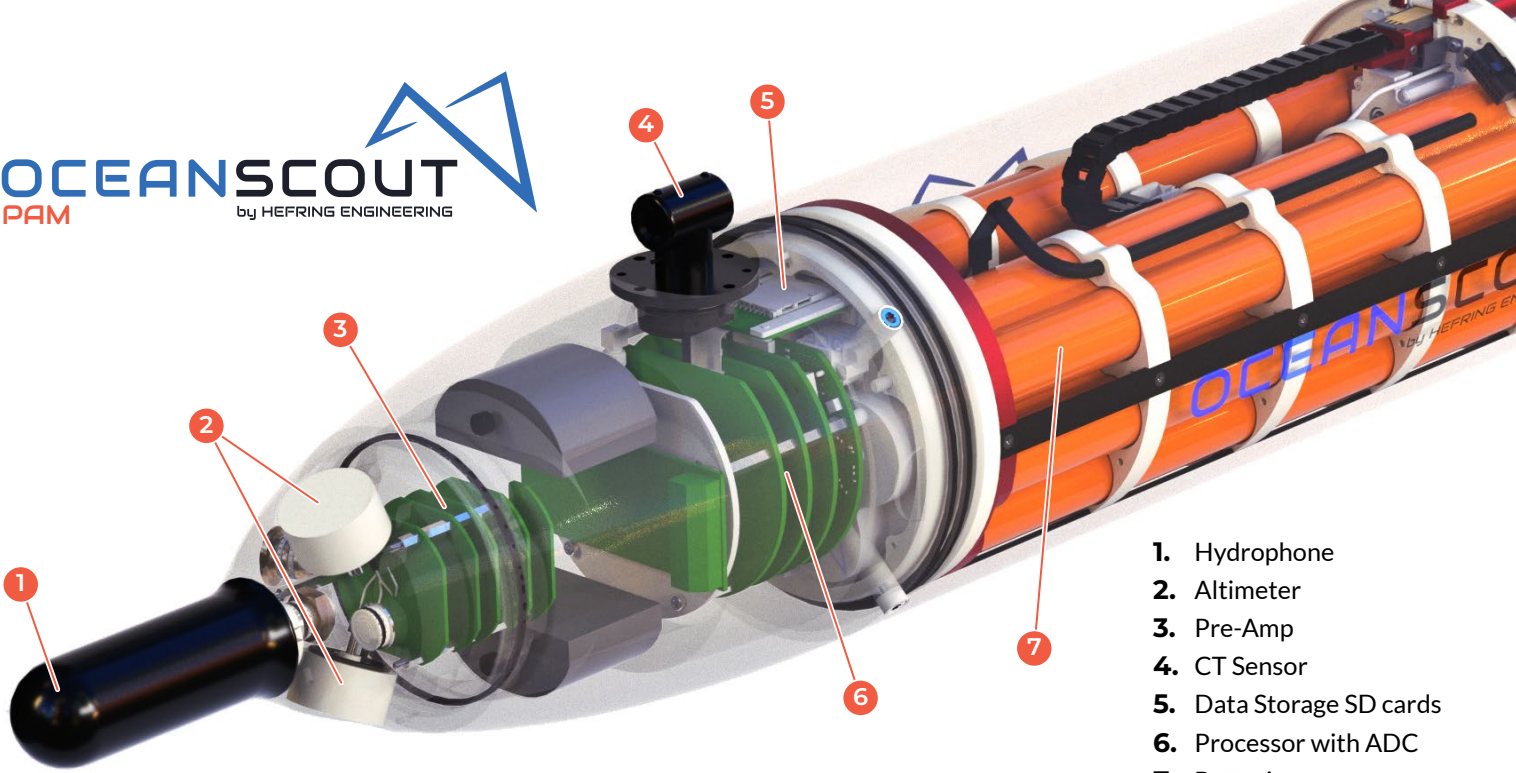


1. Hydrophone
2. Altimeter
3. Pre-Amp
4. CT Sensor
5. Data Storage SD cards
6. Processor with ADC
7. Batteries

Oceanscout-PAM employs a custom built passive acoustic measurement system, with tightly integrated hydrophone and processors, which reduce self-noise common in after-market PAM integrations.

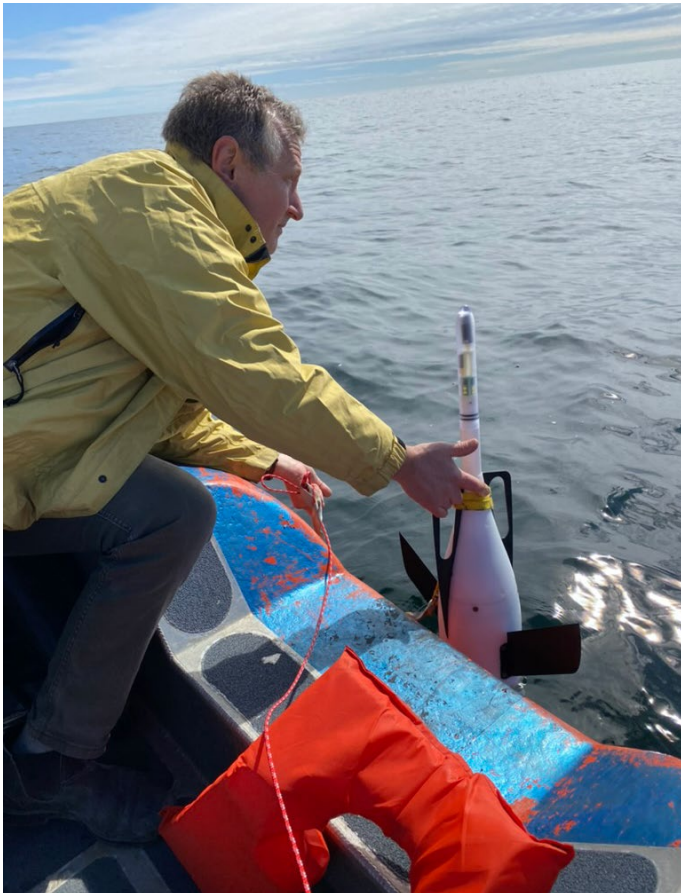

CUSTOM PAM SYSTEM	
Hydrophone	HTI-92-WB (ASW grade)
Frequency Response	2 Hz to 50 kHz
Self-noise levels below sea-state zero	up to 10 kHz
Onboard data storage	2 TB
Sampling rates	up to 250 kSPS
Data samples	24 bit

 Owned, operated, and manufacturing in the USA.

