



# MHVSR Tub

*Medium High Volume Semi Round*



Created for low density payloads that require more tub volume ◀ Stockpile or windrow ▶ Watertight; no leaks

800-779-8099 • 712-546-4409 • [sidedump.com](http://sidedump.com)

Medium High Volume  
**MHVSR**




# MHVSR Tub

## Medium High Volume Semi Round


	Model S2 MHVSR	Model S3 MHVSR
<b>Frame Length</b>	39'5"	43'4"
<b>Tub Length</b>	34'	36'
<b>Width</b>	102"	
<b>Loading Height</b>	8' 3" @ Tub side, 10' 4" @ Non-Dump side	
<b>Tub Construction</b>	3/16" AR400 Steel 1/4" Tub Floor Option is Available	
<b>Frame Construction</b>	80/100 KSI, Fabricated Steel I-Beam	
<b>Landing Gear</b>	Heavy Duty, Load Bearing Landing Legs are Standard	
<b>Bumper</b>	Push Bar Type, Bolt On	
<b>Cylinders</b>	3500 PSI, 6" Bore	
<b>Suspension</b>	Air Ride Suspension Standard Spring Ride Available	
<b>Axles</b>	25,000# Capacity	
<b>Hubs</b>	10 Hole, Hub Piloted	
<b>ABS</b>	2S1M Anti-Lock Brake System	
<b>Drums</b>	Outboard Mount, Cast Steel	
<b>Wheels</b>	Steel Disc, 8.25 x 22.5	
<b>Tires</b>	11 R 22.5 G Radial Tires	
<b>Brakes</b>	16 1/2" x 7"	
<b>Fenders</b>	Front & Rear, 1/4" Synthetic	
<b>Lights</b>	12 Volt LED ICC w/Sealed Harness	
<b>Mud Flap</b>	(4) Polyline Anti-Spray Splash Guard	
<b>Paint</b>	Polyurethane, any combination of gray, white or black Special colors available upon request	
<b>Min. Tractor Hydraulic Reqs.</b>	25-30 GPM, 2,600-2,800 PSI, 10 Gallon Reservoir	

### MHVSR Tub Capacities

	34' Tub	36' Tub
<b>Waterfull</b>	25 cu yd	27 cu yd
<b>Heaped</b>	42 cu yd	45 cu yd



### Model S2-4034 MHVSR

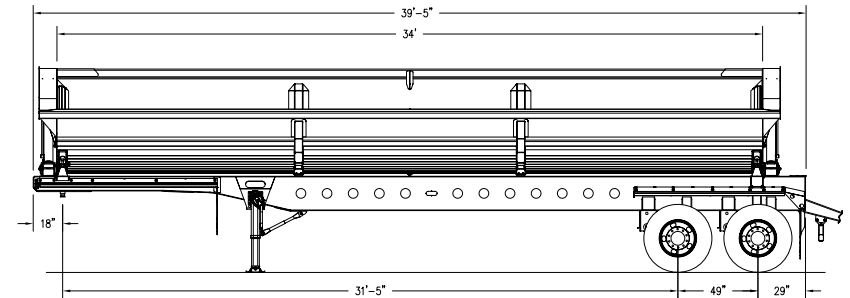

### Model S3-4436 MHVSR

