



SHV Tub

Super High Volume



Created for wet, low density payloads ◀ Stockpile or windrow ▶ Watertight; no leaks

800-779-8099 • 712-546-4409 • sidedump.com

Super High Volume
SHV




SHV Tub

Super High Volume


	Model S2-4034 SHV	Model S3-4436 SHV
Frame Length	39' 5"	43' 4"
Tub Length	34'	36'
Width	8' 6"	
Height	10' height across entire trailer	
Tub Construction	3/16" Thick, AR400 Steel Floor (1/4" available) 1/8" Thick, 80 KSI Steel Sides (3/16" AR400 available)	
Frame Construction	80/100 KSI, Fabricated Steel I-Beam	
Landing Gear	Heavy Duty, Load Bearing Landing Legs are Standard	
Bumper	Push Bar Type, Bolt-On	
Cylinders	3500 PSI, 5" Bore	
Suspension	Air Ride Suspension Standard Spring Ride Available	
Axles	25,000# Capacity	
Hubs	10 Hole, Hub Piloted	
ABS	2S1M Anti-Lock Brake System	
Drums	Outboard Mount, Cast Steel	
Wheels	Steel Disc, 8.25 x 22.5	
Tires	11 R 22.5 G Radial Tires	
Brakes	16 1/2" x 7"	
Fenders	Front & Rear, 1/4" Synthetic	
Lights	12 Volt LED ICC w/Sealed Harness	
Mud Flap	(4) Polyline Anti-Spray Splash Guard	
Paint	Polyurethane, any combination of gray, white or black Special colors available upon request	
Min. Tractor Hydraulic Reqs.	25-30 GPM, 2,600-2,800 PSI, 10 Gallon Reservoir	

SHV Tub Capacities

	34' Tub	36' Tub
Waterfull	38 cu yd	40 cu yd
Heaped	<i>Depends on the critical angle of repose of material.</i>	



Model S2-4034 SHV

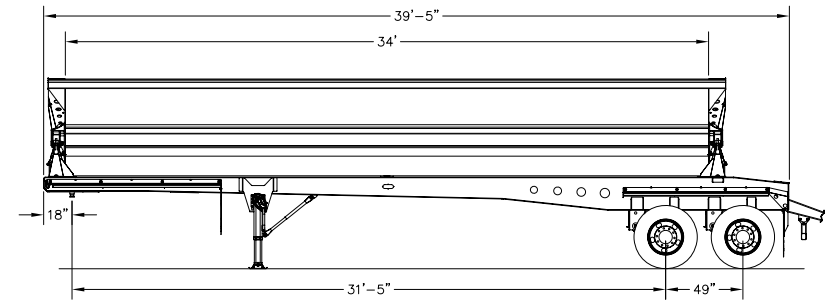

Model S3-4436 SHV

