

# SX1 Single Axle Side Dump Trailer



20' to 30' frame lengths - Stockpile or windrow - Watertight; no leaks - Low load height




### Single Axle Side Dump Trailer


## **Model SX1-2317 SmithCo Side Dump Trailer with CD-1 Dolly** Specs shown are for 22'2" frame length; other configurations available.

Specs shown die for 222 Trame length, other configurations available.			
Frame Length	22' 2"		
Tub Length	17'		
Width	8′ 6″		
Height	8' 3" at Tub side, 9' 6" at Center		
Tub Construction	1/4" Thick, AR400 Steel (or equivalent) 3/16" Thick, AR400 Steel (or equivalent) is optional		
Frame Construction	80/100 KSI, Fabricated Steel I-beam		
Bumper	Under-Ride Type		
Cylinders	3500 PSI, 5" bore		
Dolly	Single Axle		
Connection	Turntable		
Tongue	3" Premier Swivel Drawbar Eye. Premier Tongue Hinge Assembly (poly)		
Hinges	Self-Aligning, Spherical Bearing Type (greaseable)		
Suspension	Air Ride Suspension Standard; Spring Ride Available		
Axles	(2) 25,000# capacity		
Hubs	10 Hole, Hub Piloted		
ABS	2S1M Anti-Lock Brake System		
Drums	Outboard Mount, Cast Steel		
Wheels	Steel Disc, 8.25 x 22.5 (8)		
Tires	11R 22.5 G Radial Tires (8)		
Brakes	16 1/2" x 7"		
Fenders	Front & Rear, 1/4" Synthetic, 7 Degree Slope		
Lights	12 Volt ICC w/ Sealed Harness		
Mud Flap	(2) Polyline Anti-Spray Splash Guard w/SmithCo name		
Paint	Polyurethane, any combination of gray, white or black Special colors available upon request		

#### **SX1 Tub Capacities**

	17' Tub	25' Tub
Waterfull	11.5 cu yd	16.75 cu yd
Heaped	15.5 cu yd	22.5 cu yd



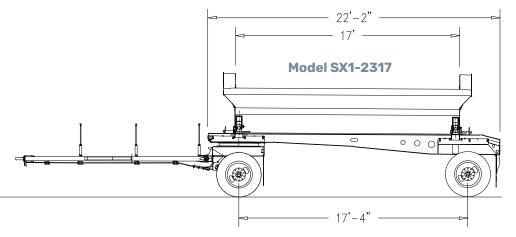

Min. Tractor **Hydraulic Reqs.** 

25-30 GPM, 2,600-2,800 PSI, 10 Gallon Reservoir