


The BLADE Air Post System is a sleek, minimalist evolution of our popular BLADE Post System. Designed with an ultra-contemporary aesthetic, it removes the bottom center bar for an even less obstructed view, further emphasizing openness while maintaining structural integrity. The system consists of two 2" wide vertical posts and incorporates a unique cube cap at the top. Its precision design ensures stability, whether for cable, glass, or other infill options, making it ideal for modern architectural spaces where clean lines and minimal intrusion are paramount.



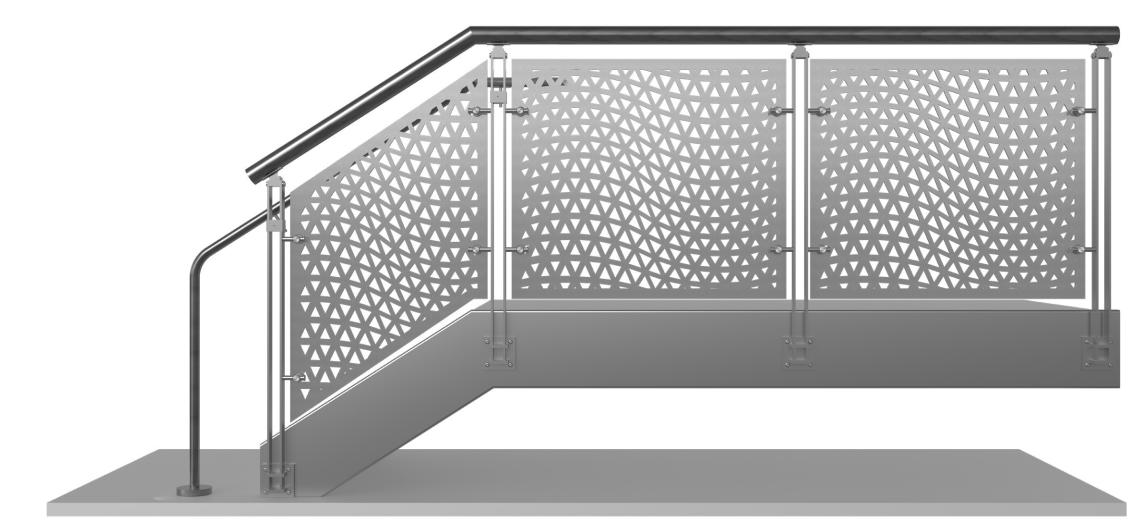

# BLADE Air glass & Metal System - Technical Data


|                    | MATERIAL                                                                                             | FINISH                                                                                                                                                                                                            | SIZE/SPACING                                                                                                                                                                       |
|--------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| POST               | Stainless Steel (304 or 316)  Stainless Steel (201)                                                  | - #6 Satin  - CeraShield (Recommended) - Powder Coat - PVDF VIVA Standard: All brackets, spiders, and accessories are satin finish stainless steel and are not coated. A coated finish is available upon request. | 2X2-1/4" @ 5'-0" max. O.C. 4'-6" max. for perforated and wire mesh infill. 4'-0" max. for Multiline. Fascia, Top or Core mount.                                                    |
| INFILL OPTIONS     | Glass                                                                                                | Clear, Digitally Printed, Tinted,<br>Colored Interlayer, Cast                                                                                                                                                     | Min. 3/8" laminated glass with PVB or SGP interlayer <sup>1</sup> Glass standard thickness: 3/8", 1/2", 5/8", 3/4"  Interlayer standard thickness: SGP: 0.035", 0.06"  PVB: 0.035" |
|                    | Picket                                                                                               | - #6 Satin<br>- CeraShield (Recommended)<br>- Powder Coat<br>- PVDF                                                                                                                                               | Ø1/2" picket                                                                                                                                                                       |
|                    | Perforated Metal                                                                                     |                                                                                                                                                                                                                   | 1" wide frame                                                                                                                                                                      |
|                    | Laser Cut                                                                                            |                                                                                                                                                                                                                   | 1/4" thick aluminum                                                                                                                                                                |
|                    | Steel Wire Mesh Weld Applies for WM-38ST and WM-50ST wire mesh options.                              |                                                                                                                                                                                                                   | 1" wide frame                                                                                                                                                                      |
|                    | Stainless Steel Wire Mesh Weld Applies for WM-38SS and WM-50SS wire mesh options.                    | #6 Satin                                                                                                                                                                                                          |                                                                                                                                                                                    |
|                    | Stainless Steel Wire Mesh Woven Applies for WM-10SS, WM-11SS, WM-13SS and WM-14SS wire mesh options. |                                                                                                                                                                                                                   |                                                                                                                                                                                    |
|                    | Multiline                                                                                            |                                                                                                                                                                                                                   | Ø1/2" multiline                                                                                                                                                                    |
|                    | CableNet                                                                                             |                                                                                                                                                                                                                   | Ø1" frame, Ø1/16" (1.5mm) cable mesh                                                                                                                                               |
|                    |                                                                                                      |                                                                                                                                                                                                                   |                                                                                                                                                                                    |
| TOP RAIL/HAND RAIL | Stainless Steel Tube                                                                                 | - #6 Satin (Recommended) - CeraShield - Powder Coat - PVDF                                                                                                                                                        | Ø1-1/2" or Ø2" for Hand Rail<br>Ø1-1/2", Ø2" or 2"x1" Rectangular Tube for Top Rail                                                                                                |
|                    | Stainless Steel Tube with LED <sup>2</sup>                                                           |                                                                                                                                                                                                                   | Ø1-1/2" with LED LINEAR, Ø1-1/2" or Ø2" with LED POD                                                                                                                               |
|                    | Wood (Red Oak, Cherry or Maple) <sup>3</sup>                                                         | Unstained                                                                                                                                                                                                         | Ø2"                                                                                                                                                                                |
|                    | Wood (Red Oak, Cherry or Maple) with LED                                                             |                                                                                                                                                                                                                   | Ø2" with LED LINEAR                                                                                                                                                                |
|                    |                                                                                                      |                                                                                                                                                                                                                   |                                                                                                                                                                                    |



- 1. IBC 2015 & newer requires railing glass to be laminated. VIVA recommends SGP for exterior applications.
- 2. All LED LINEAR products are ETL certified; ETL mark is proof of product compliance to North American safety standard.
- 3. Other species available upon request.
















### BLADE Air RAILING SYSTEM LASER CUT INFILL

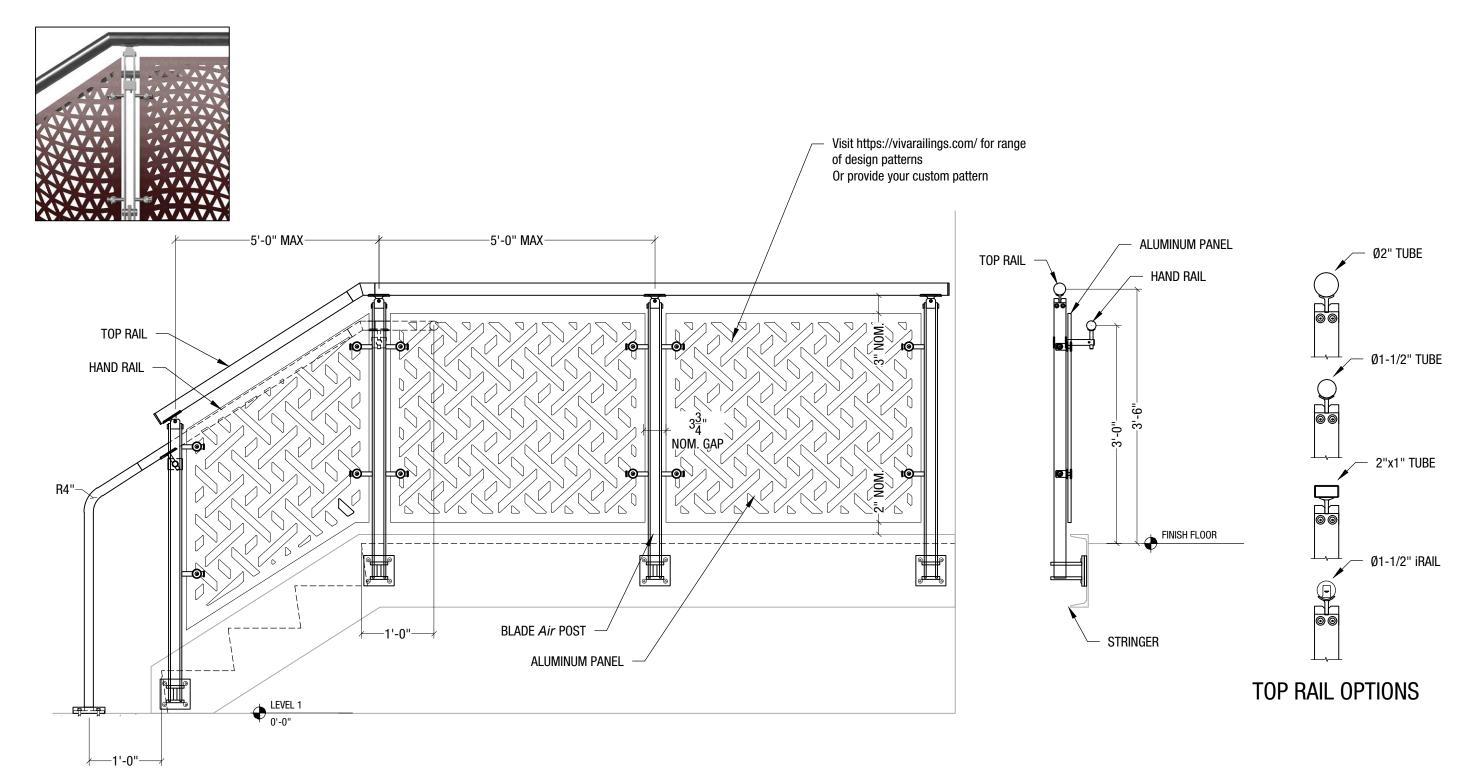




### **BLADE Air** RAILING SYSTEM PERFORATED METAL INFILL

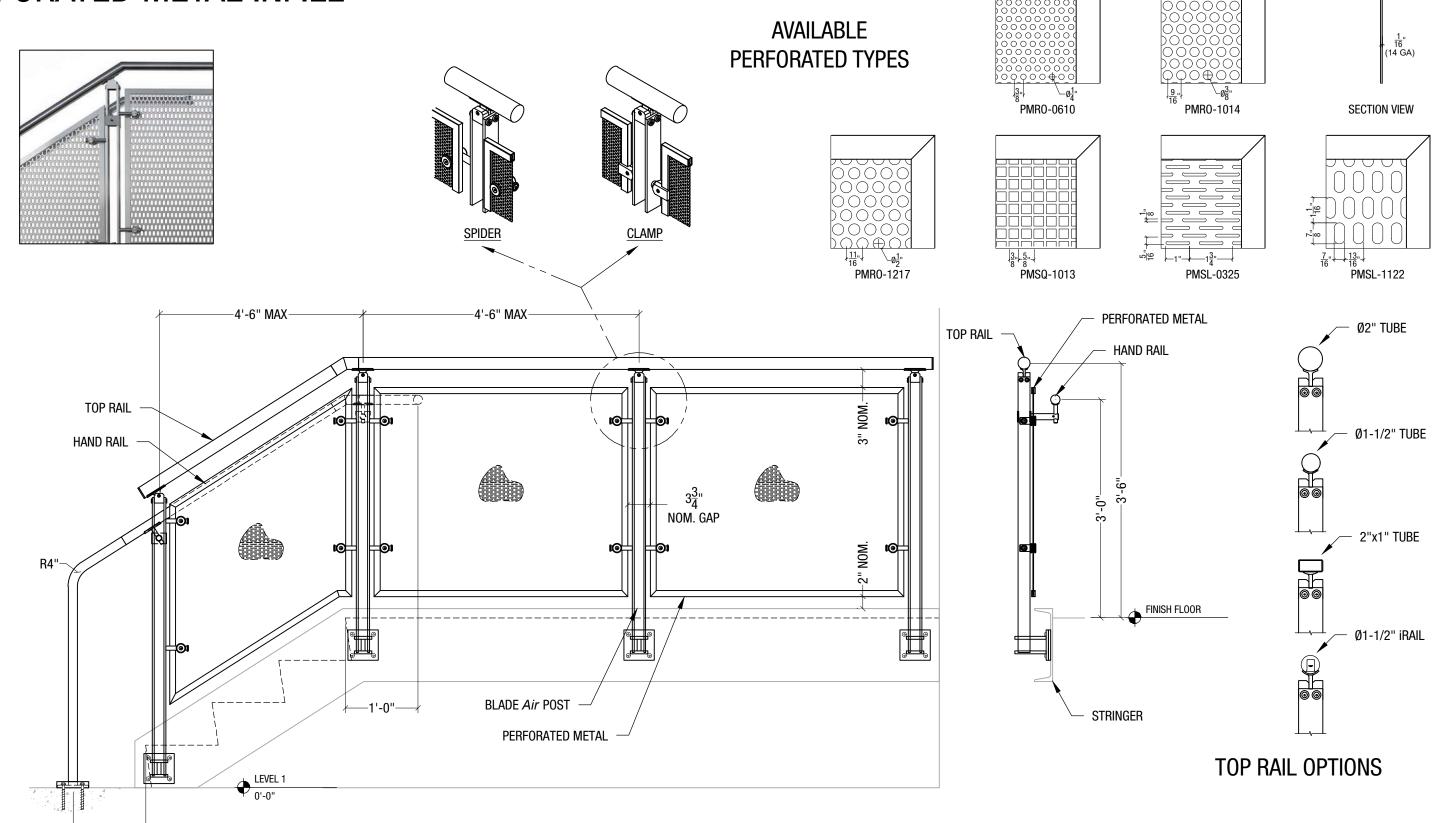













BLADE Air railing system WIRE MESH INFILL **AVAILABLE WIRE MESH TYPES** PRESENTATION ... WM-13SS WM-10SS WM-38ST WM-50ST (Woven SS) (Woven SS) (Woven SS) (Welded Steel) (Welded Steel) **WM-14SS WM-20SS WM-11SS** WM-38SS WM-50SS (Woven SS) (Woven SS) (Woven SS) (Welded Stainless Steel) (Welded Stainless Steel) -4'-6" MAX-4'-6" MAX WIRE MESH Ø2" TUBE **TOP RAIL** HAND RAIL TOP RAIL Ø1-1/2" TUBE HAND RAIL NOM. GAP - 2"x1" TUBE FINISH FLOOR Ø1-1/2" iRAIL BLADE Air POST —1'**-**0"— **STRINGER** WIRE MESH **TOP RAIL OPTIONS** + LEVEL 1







### BLADE Air railing system **GLASS INFILL**



**AVAILABLE GLASS TYPES** 














Clear Laminated (PVB or SGP)


Tinted

Colored Interlayer

Frosted

Casted

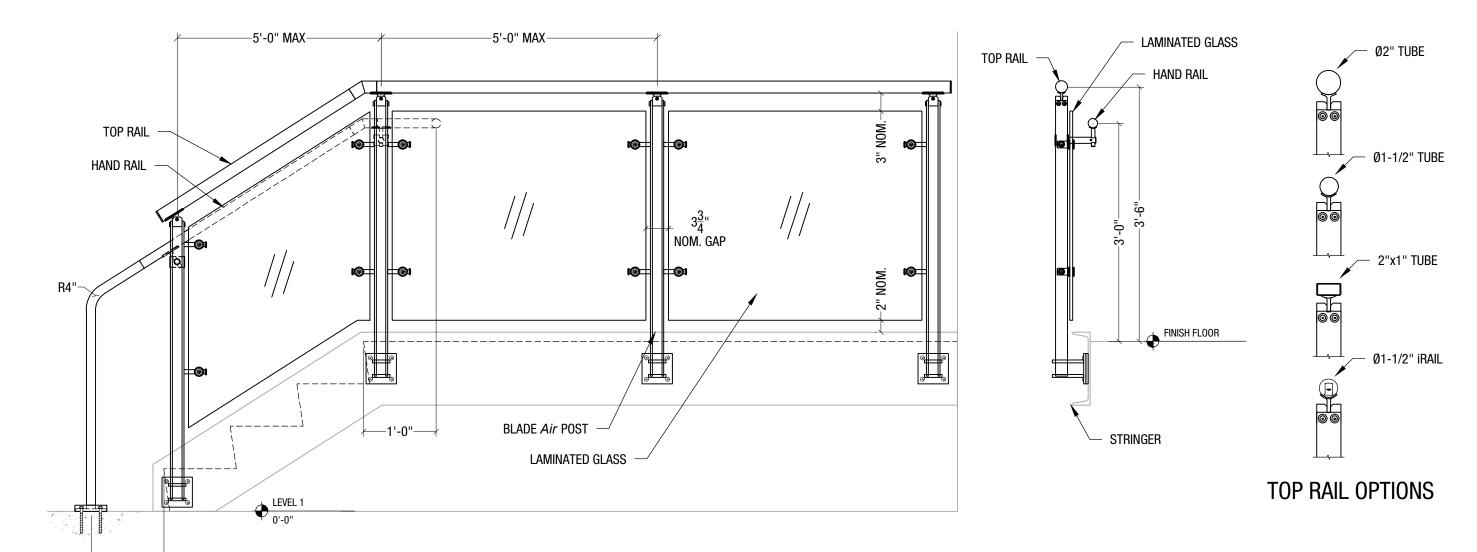

















### BLADE Air RAILING SYSTEM **MULTILINE INFILL**

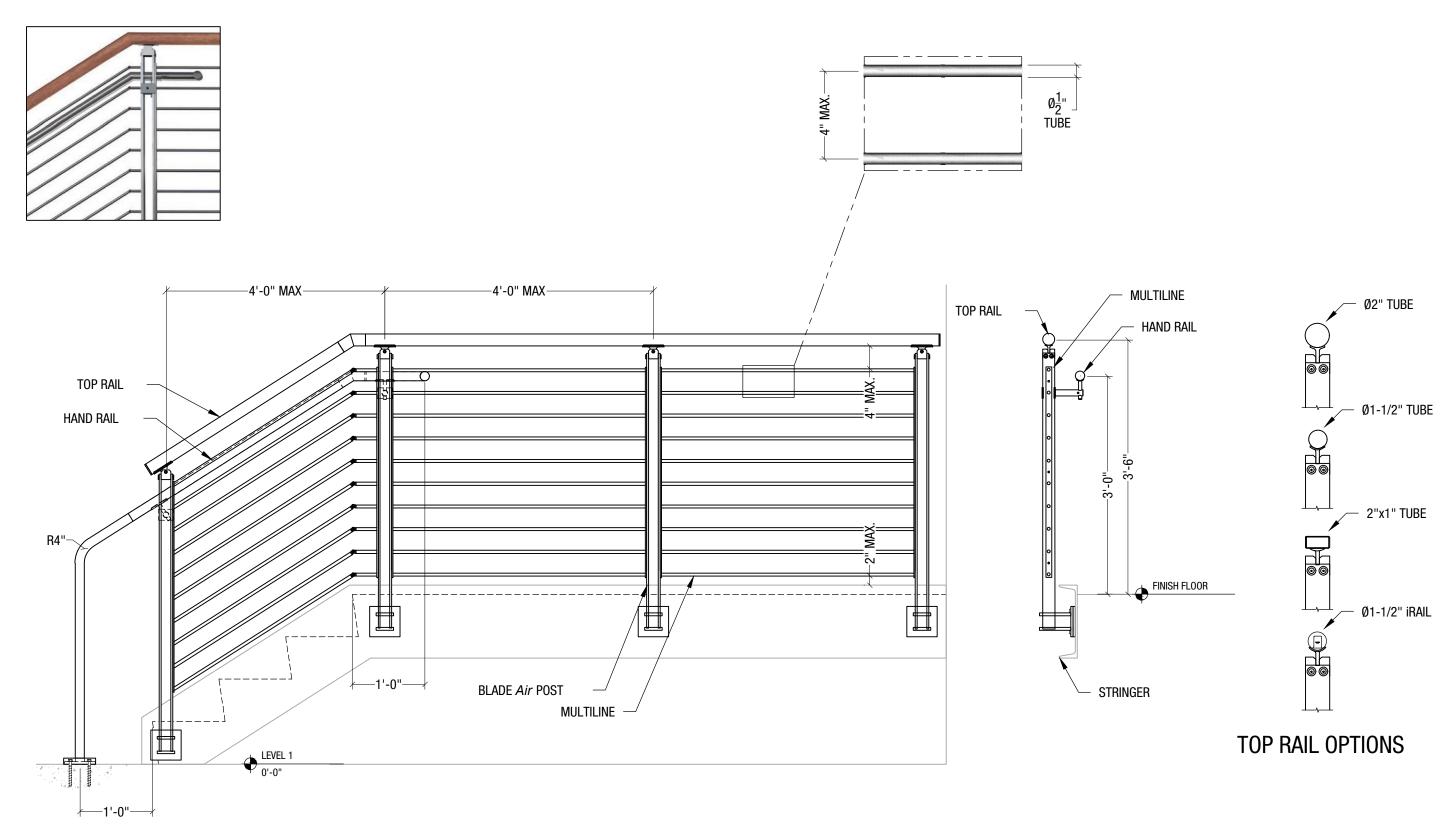




### BLADE Air RAILING SYSTEM **CABLENET INFILL**



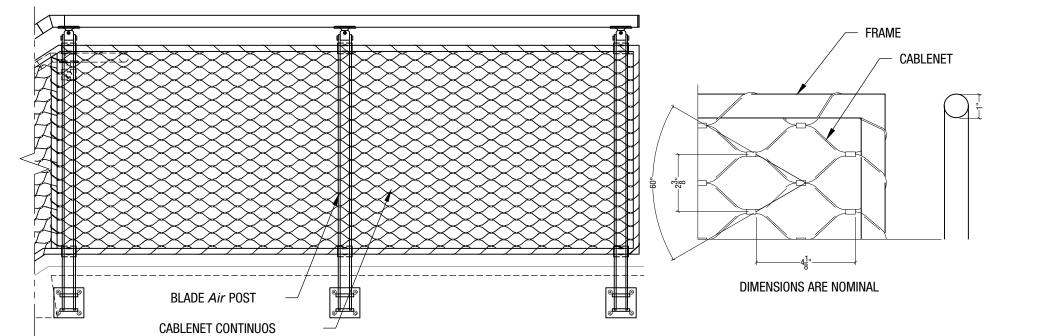

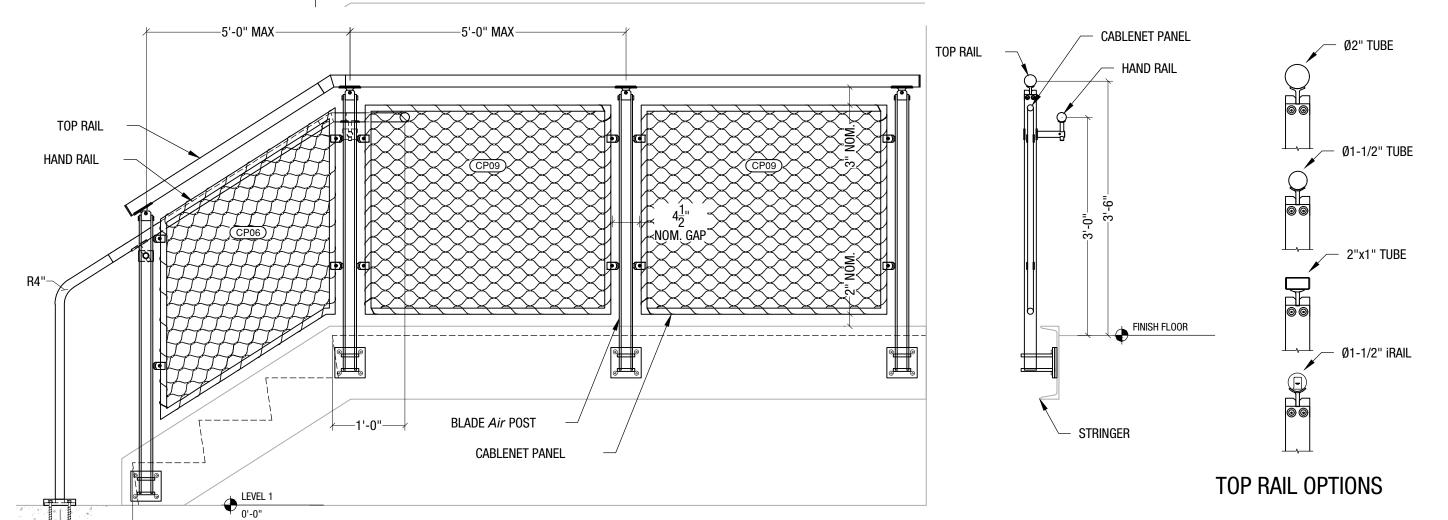


VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF ANY BUILDING SYSTEMS OR OTHER MATERIALS NOT FURNISHED BY VIVA RAILINGS. VIVA RAILINGS SYSTEMS TO WHICH VIVA RAILINGS' PRODUCTS ARE TO BE ATTACHED ARE STRUCTURALLY SOUND OR DESIGNED TO PROPERLY SUPPORT VIVA RAILINGS'S MATERIALS. ANY SUCH DESIGN RESPONSIBILITY BELONGS TO OTHERS FOR WHOM VIVA RAILINGS IS NOT RESPONSIBLE. THESE DRAWINGS ARE INTENDED FOR THE INSTALLATION OF PRODUCTS FURNISHED BY VIVA RAILINGS. VIVA RAILINGS REMAINS THE SOLE OWNER OF ALL DESIGNS AND INTELLECTUAL PROPERTY





7x7 CONSTRUCTION

CABLE











### BLADE Air RAILING SYSTEM PICKET INFILL

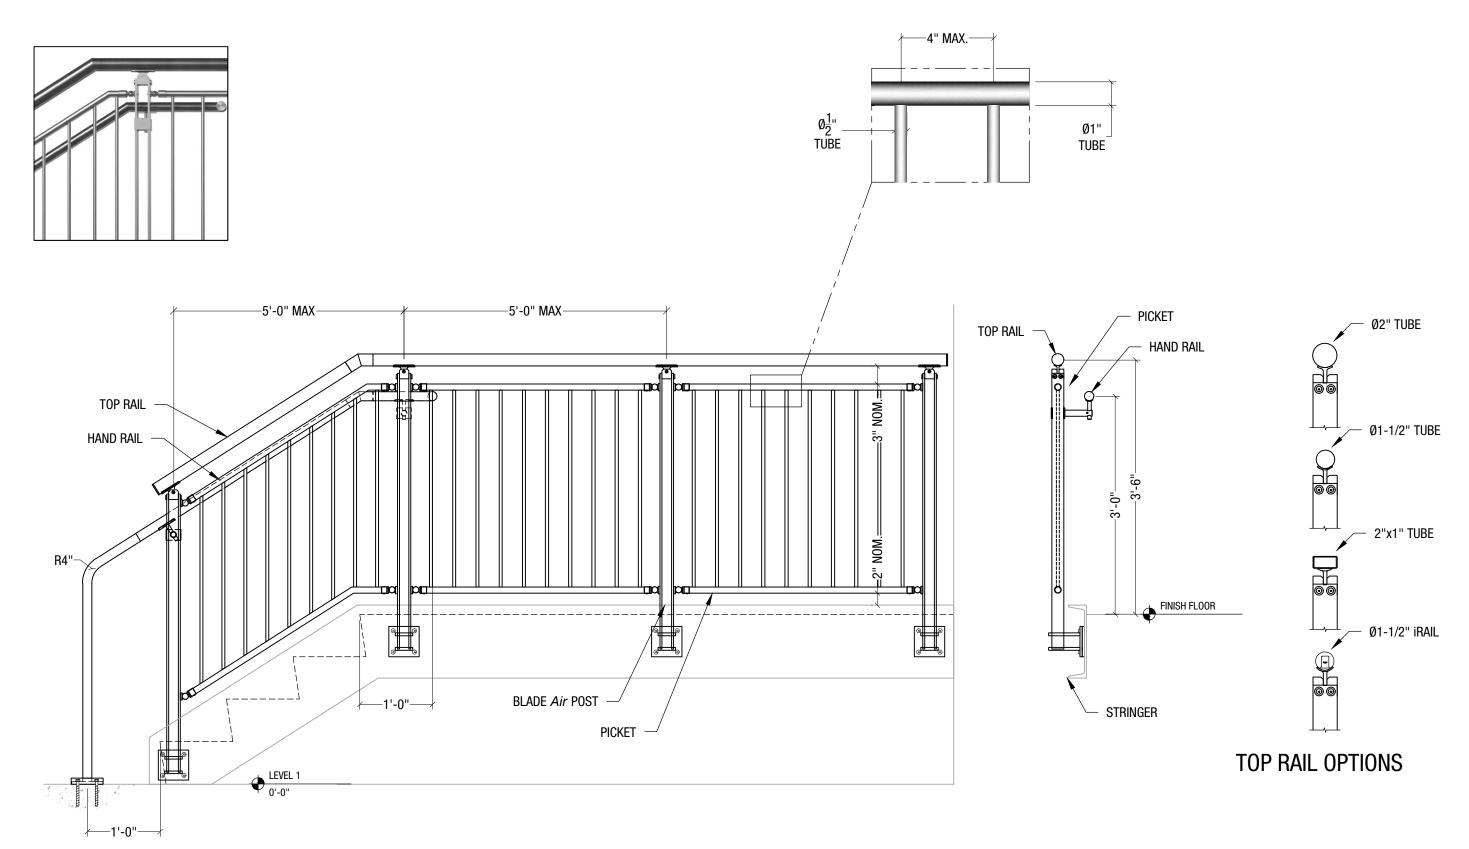






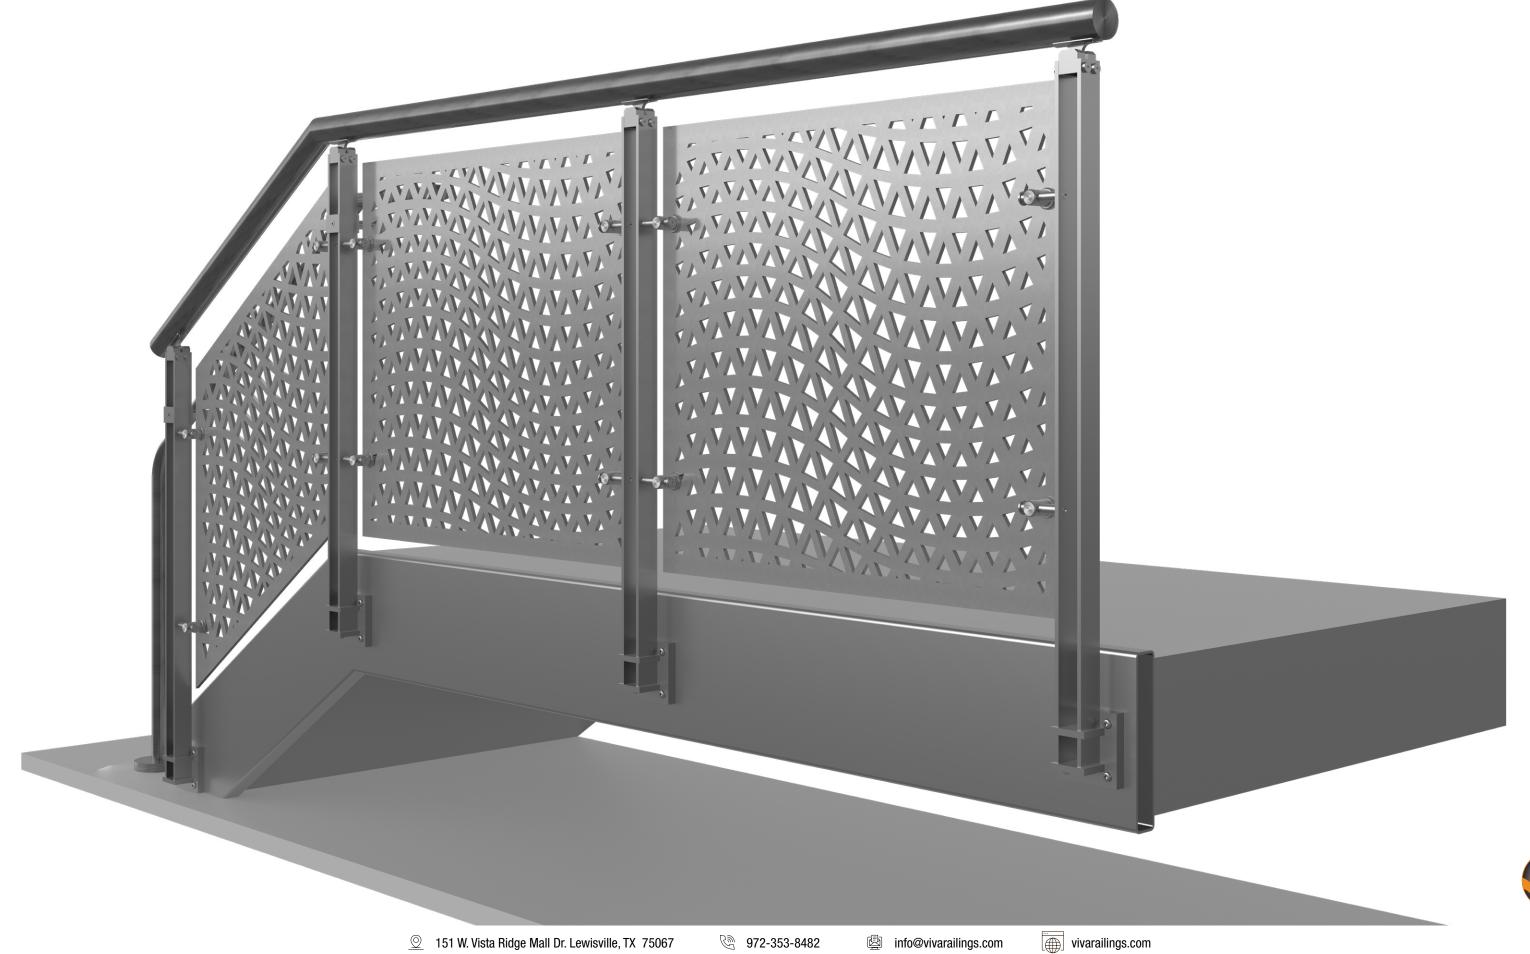


#### BLADE Air railing system

#### MOUNTING CONDITION, TOP MOUNTED POST

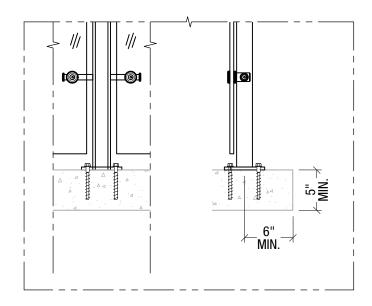



Anchored to Concrete 1 - \$ 2

Detail# BLA-T01 3

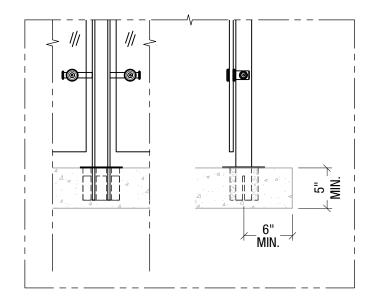


Cored into Concrete - \$\$



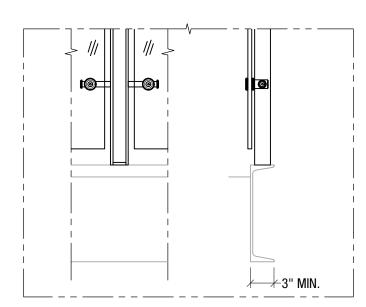


Welded @ Steel Channel - \$ Detail# BLA-T03

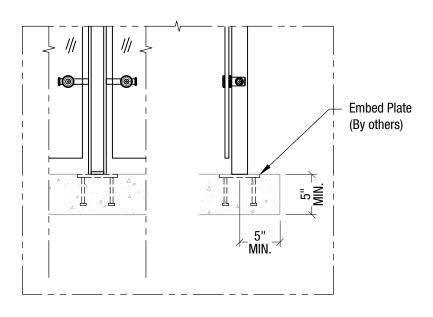


Welded @ Embed Plate - \$

Detail# BLA-T04

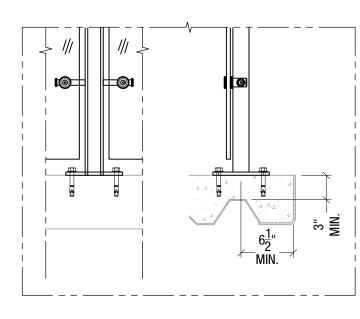

Anchored to Concrete Slab on Deck - \$\$ Detail# BLA-T05

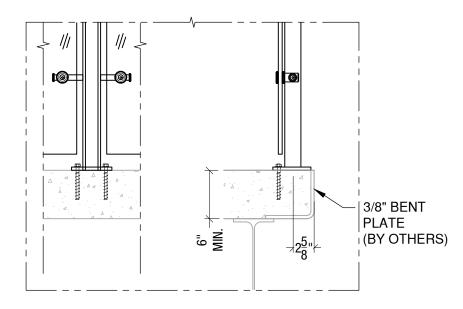

**Anchored to Concrete** Welded to Steel Plate - \$

Detail# BLA-T06




<sup>(2) \$</sup> to \$\$\$: Indicates mounting type comparative cost




<sup>(3)</sup> Bolting is not a available option for top mount with cable infill

#### BLADE Air railing system


#### MOUNTING CONDITION, FASCIA MOUNTED POST

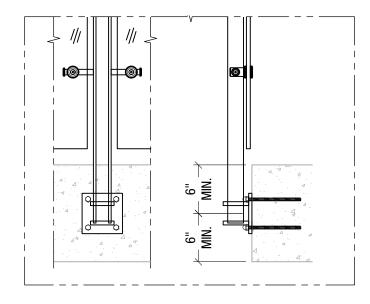

Anchored to Concrete 1 - \$\$\$ Detail# BLA-F01

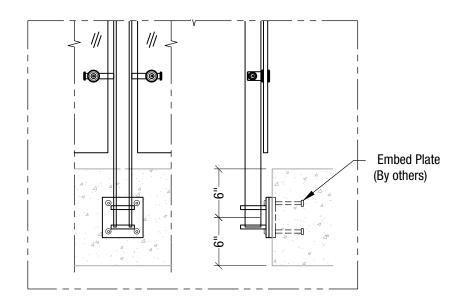


Welded @ Embed Plate - \$\$ Detail# BLA-F02

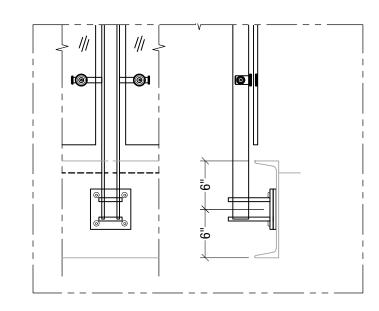


Welded @ Steel Channel - \$\$

Detail# BLA-F03

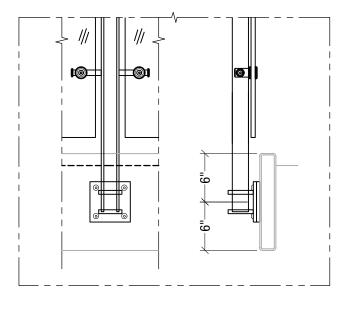

Welded @ Steel Tube - \$\$ Detail# BLA-F04

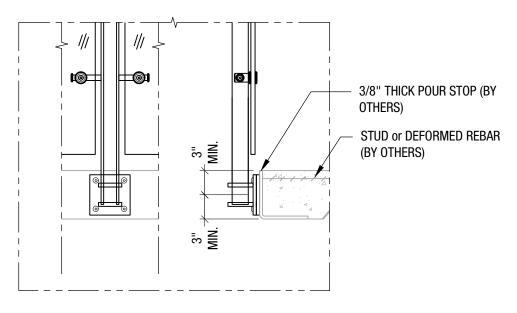


Welded @ Pour Stop - \$\$ Detail# BLA-F05


(1) Min. 4000 PSI concrete, Typ.













### BLADE Air RAILING SYSTEM

#### ILLUMINATED RAILING

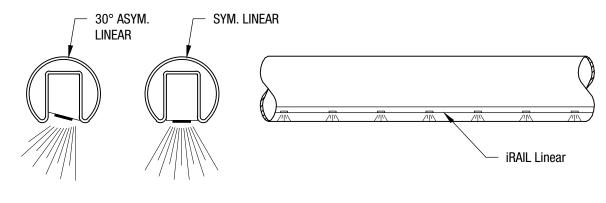


**IRAIL LINEAR ORIENTATION OPTIONS** 

**IRAIL POD ORIENTATION OPTIONS** 

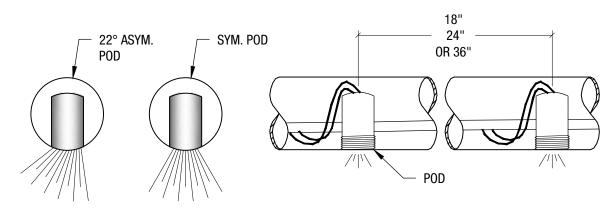



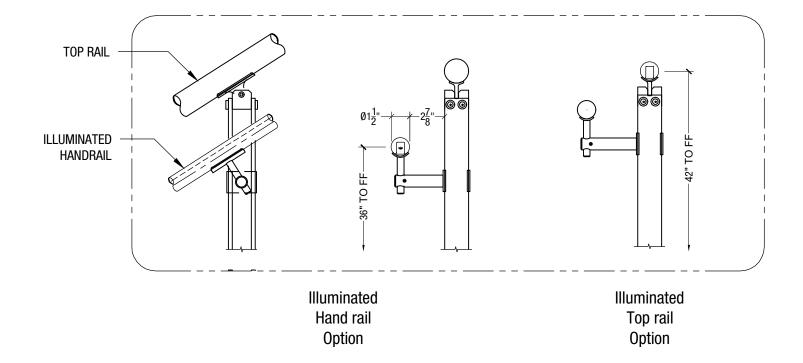














#### BLADE Air railing system

#### FINISHING OPTIONS

#### #6 Satin

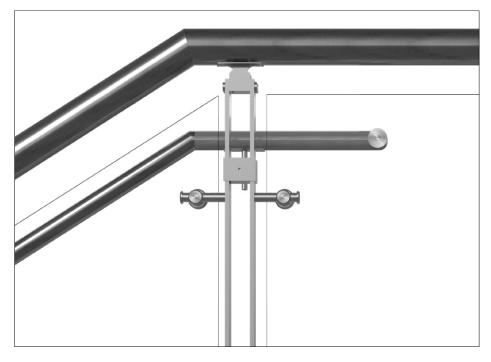


#### **CeraShield\* Ceramic Coating**

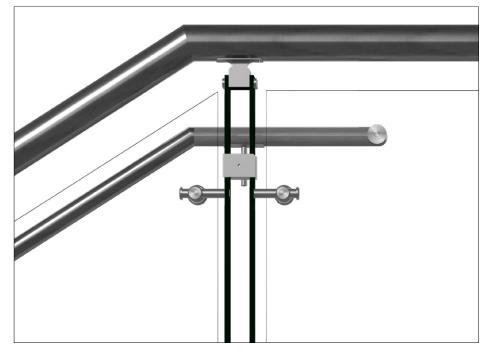

Enhanced durability and superior protection. Available in a wide range of colors. (Replaces traditional powder coat finish options.)

\*VIVA Railings now proudly offers CeraShield Ceramic Coating (powered by CERAKOTE Technology) as our premium finishing option, providing enhanced durability and superior protection for interior and exterior applications. While CeraShield offers unparalleled advantages in hardness, corrosion resistance, UV stability, and chemical resistance, we will continue to offer standard Powder Coat finishes to meet a variety of aesthetic

#### **Powder Coat**

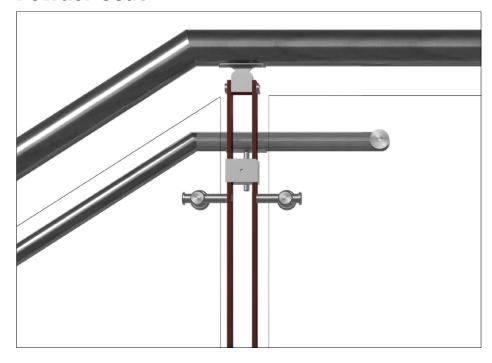


Powder coating is an environmentally-friendly option because it doesn't rely on solvents or chemical carriers. Instead, an electrostatic charge holds the paint to the steel, thus eliminating VOC emissions which will help in regards to LEED requirements. In addition, it meets AAMA specifications. Powder coating is durable and scratch resistant so it weathers and retains its original hue better than conventional liquid coatings.\*



POWDER COAT FINISHING OPTIONS


**CERASHIELD FINISHING OPTIONS** 









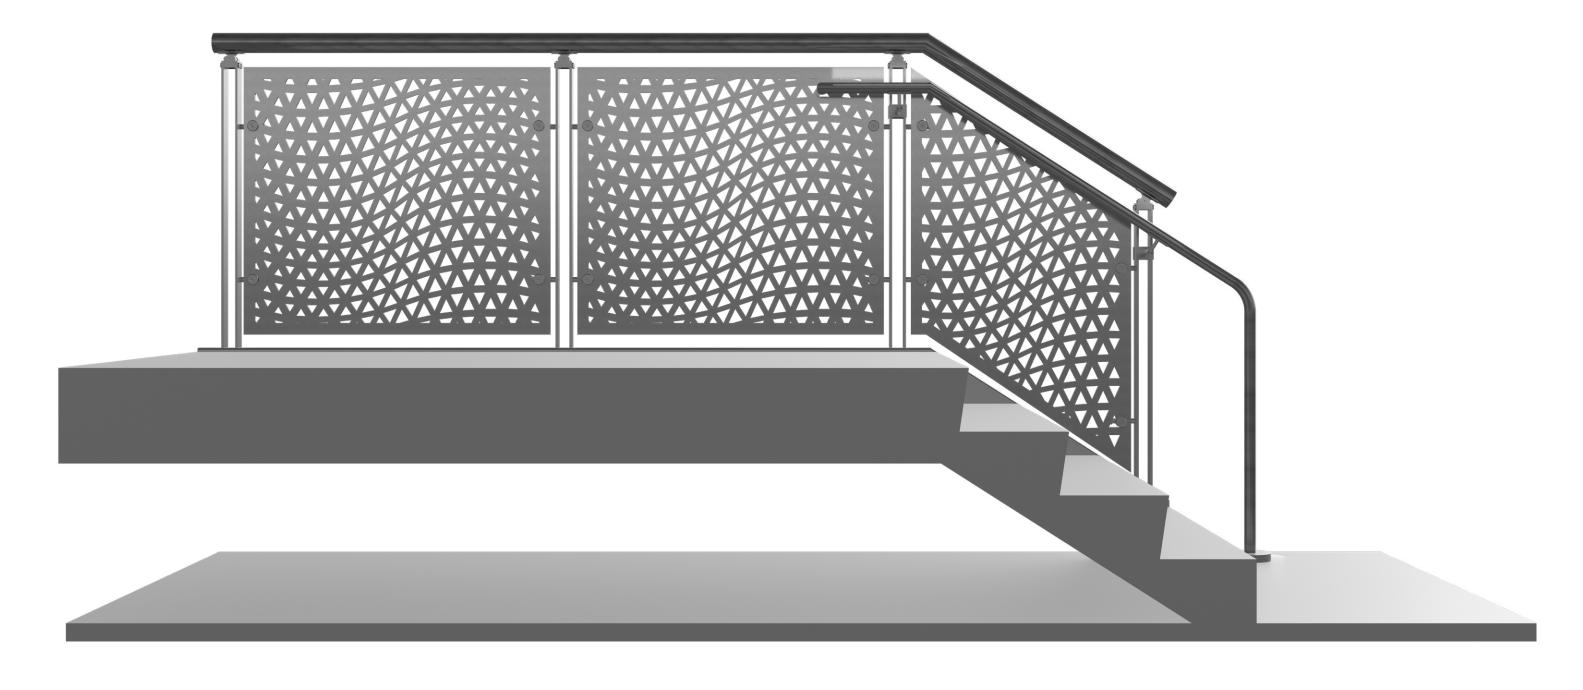












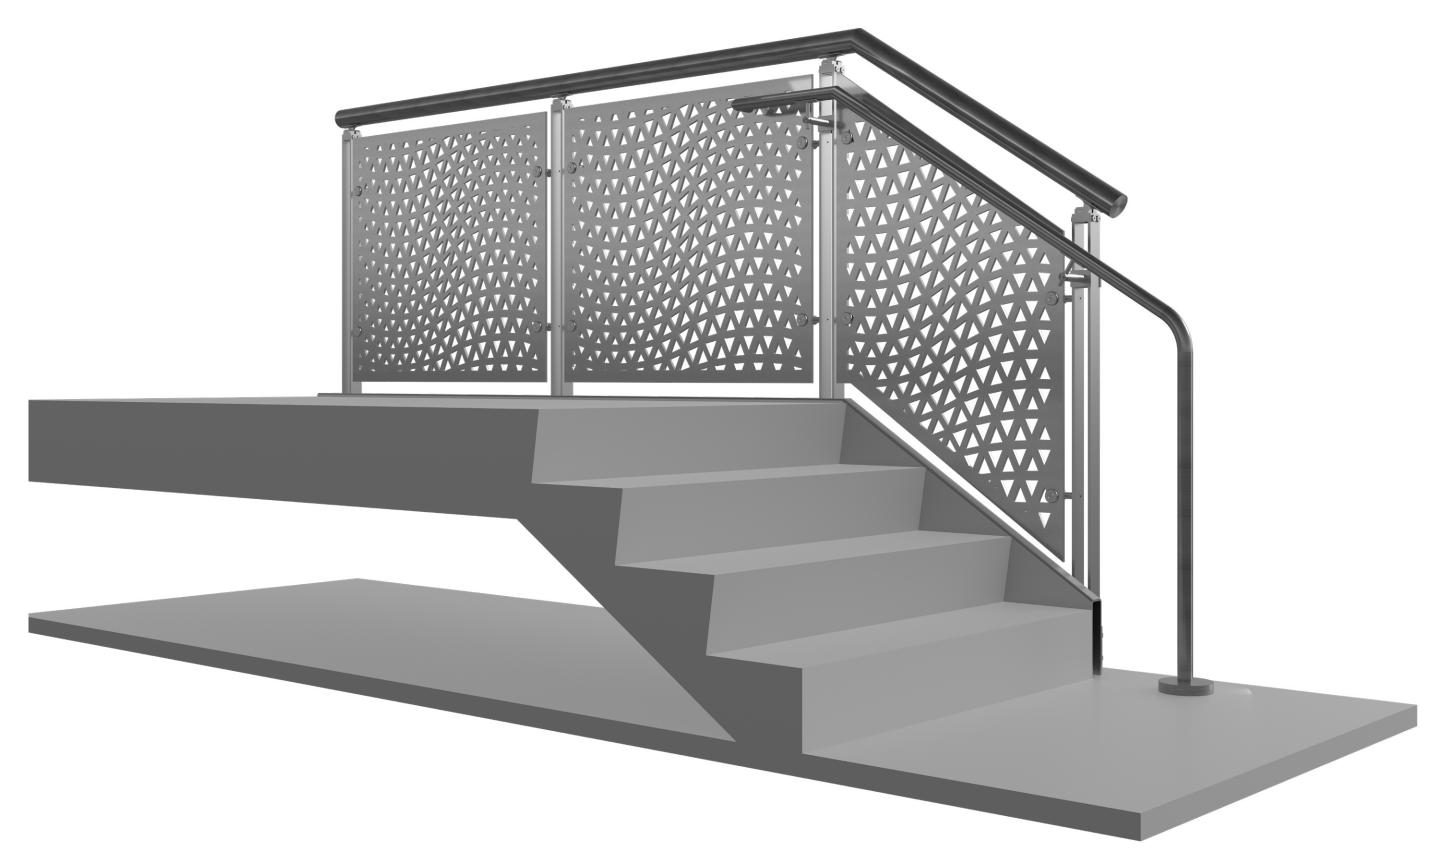





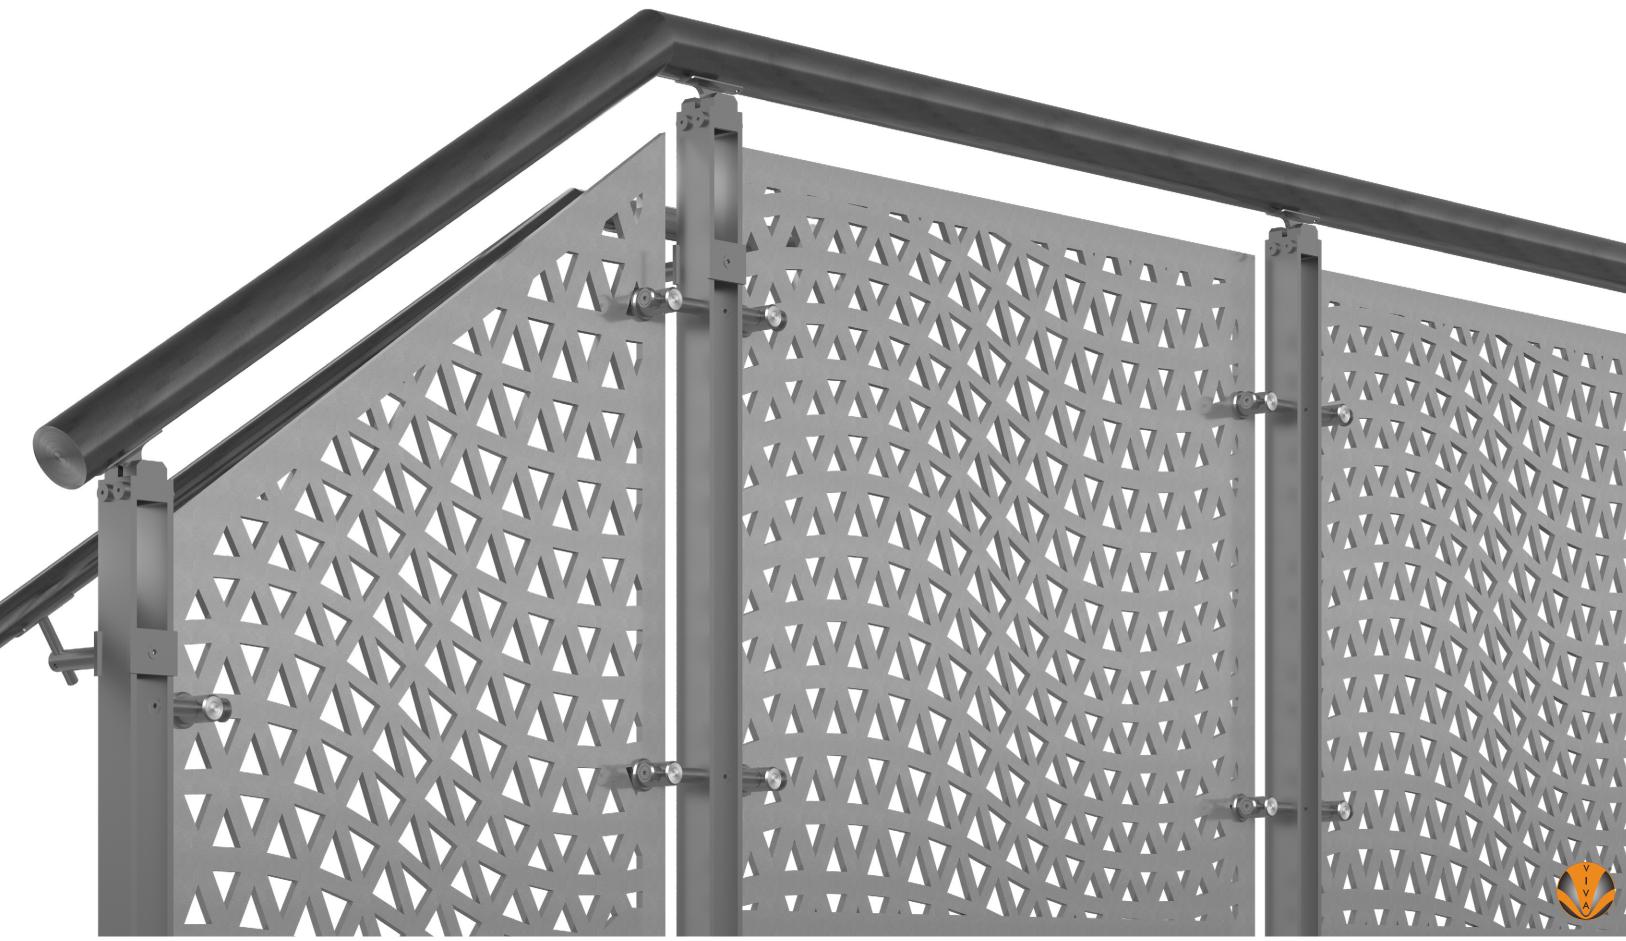

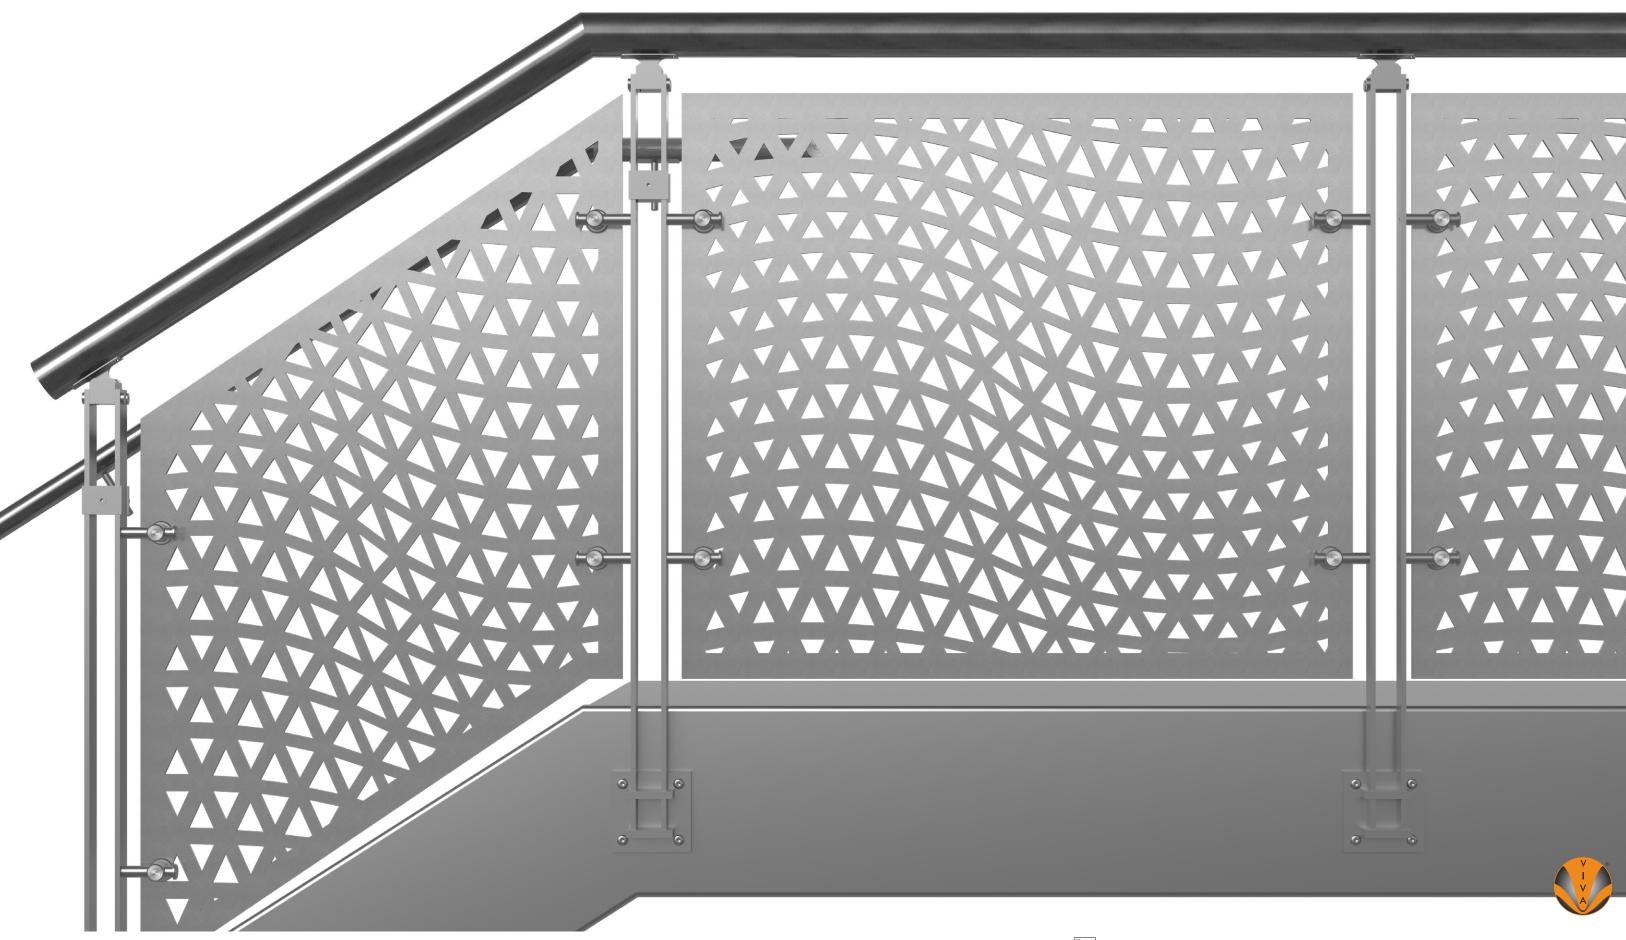



#### 151 W. Vista Ridge Mall Dr. Lewisville, TX 75067

(Dallas/Fort Worth Metroplex)

PH: 972.353.8482 | info@vivarailings.com vivarailings.com



Inc. Magazine 500 | 5000 VIVA RAILINGS, LLC. Among The Fastest Growing US Companies Eight Years in a Row **2012-2019** 



Inc. Magazine 500 | 5000 VIVA RAILINGS, LLC. Among The Fastest Growing Texas Companies #211



ICC-ES 4405 Certified SH0E™ Structural Glass Railing System



LEED
Material & Resources Credits 4.1 and 4.2



The American Institute of Architects



The California Contractors State License Board Certified