




CIRCA WIRE MESH RAILING SYSTEM

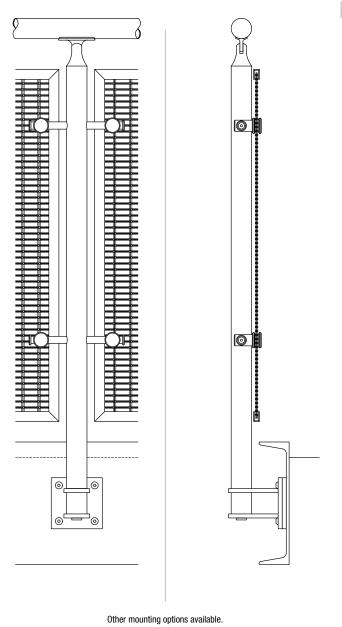



Our CIRCA Stainless Steel Railing System provides a simple yet timeless look. The system consists of round tubular posts and the railing in-fill between the posts is mounted via fixed point holders.

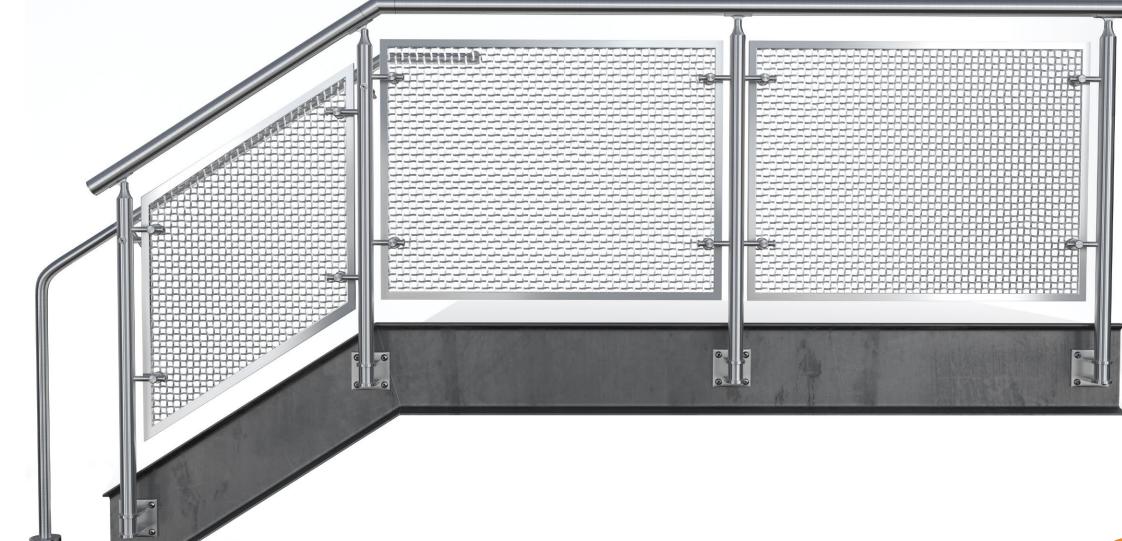





CIRCA GLASS & METAL SYSTEM - TECHNICAL DATA

	MATERIAL	FINISH	SIZE/SPACING
		1	
POST	Stainless Steel (304 or 316)	- #6 Satin - CeraShield (Recommended) - Powder Coat - PVDF VIVA Standard: All brackets, spiders, and accessories are satin finish stainless steel and are not coated. A coated finish is available upon request. Ø2" @ 5'-0" max. 0.C. 4'-6" max. for perforated and wire mesh infill. 4'-0" max. for Multiline and cable infill. Fascia, Top or Core mount.	
	Stainless Steel (201)		4'-6" max. for perforated and wire mesh infill. 4'-0" max. for Multiline and cable infill.
INFILL OPTIONS	Glass	Clear, Digitally Printed, Tinted, Colored Interlayer, Cast	Min. 3/8" laminated glass with PVB or SGP interlayer ¹ Glass standard thickness: 3/8", 1/2", 5/8", 3/4" Interlayer standard thickness: SGP: 0.035", 0.06" PVB: 0.035"
	Picket	- #6 Satin - CeraShield (Recommended) - Powder Coat - PVDF	Ø1/2" picket
	Perforated Metal		1" wide frame
	Laser Cut		1/4" thick aluminum
	Steel Wire Mesh Weld Applies for WM-38ST and WM-50ST wire mesh options.		1" wide frame
	Stainless Steel Wire Mesh Weld Applies for WM-38SS and WM-50SS wire mesh options.	#6 Satin	
	Stainless Steel Wire Mesh Woven Applies for WM-10SS, WM-11SS, WM-13SS and WM-14SS wire mesh options.		
	Multiline		Ø1/2" multiline
	Cable		Ø3/16" cable
	CableNet		Ø1" frame, Ø1/16" (1.5mm) cable mesh
TOP RAIL/HAND RAIL	Stainless Steel Tube	+#6 Satin (Recommended)CeraShieldPowder CoatPVDF	Ø1-1/2" or Ø2" for Hand Rail Ø1-1/2", Ø2" or 2"x1" Rectangular Tube for Top Rail
	Stainless Steel Tube with LED ²		Ø1-1/2" with LED LINEAR, Ø1-1/2" or Ø2" with LED POD
	Wood (Red Oak, Cherry or Maple) ³	- Unstained	Ø2"
	Wood (Red Oak, Cherry or Maple) with LED		Ø2" with LED LINEAR



- 1. IBC 2015 & newer requires railing glass to be laminated. VIVA recommends SGP for exterior applications.
- 2. All LED LINEAR products are ETL certified; ETL mark is proof of product compliance to North American safety standard.
- 3. Other species available upon request.
















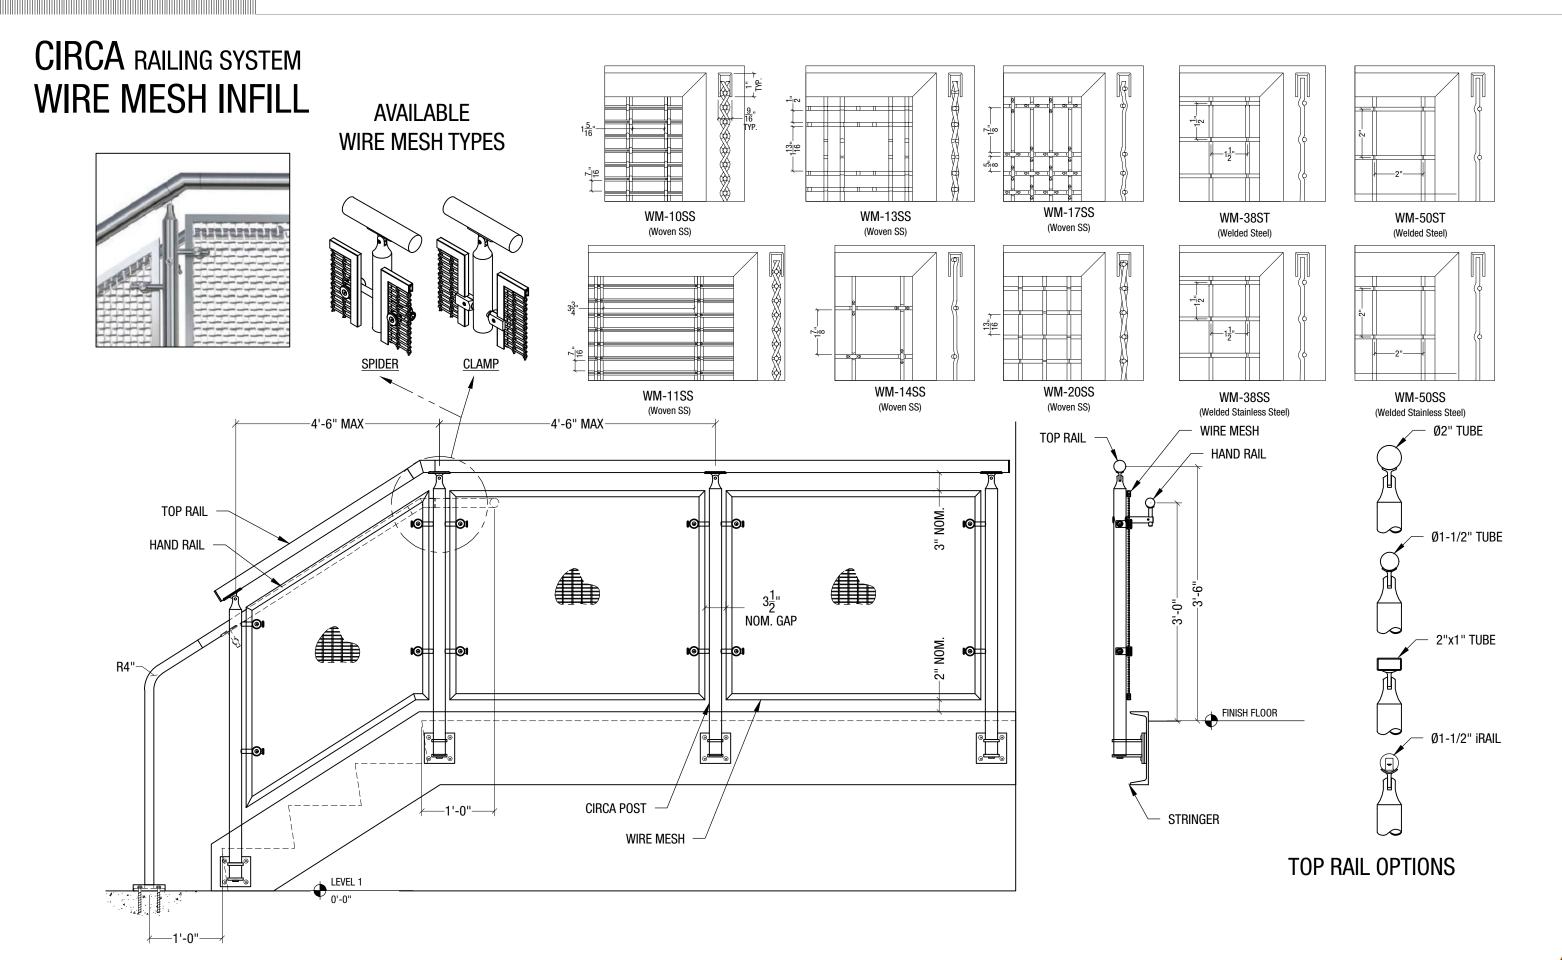




CIRCA RAILING SYSTEM PERFORATED METAL INFILL

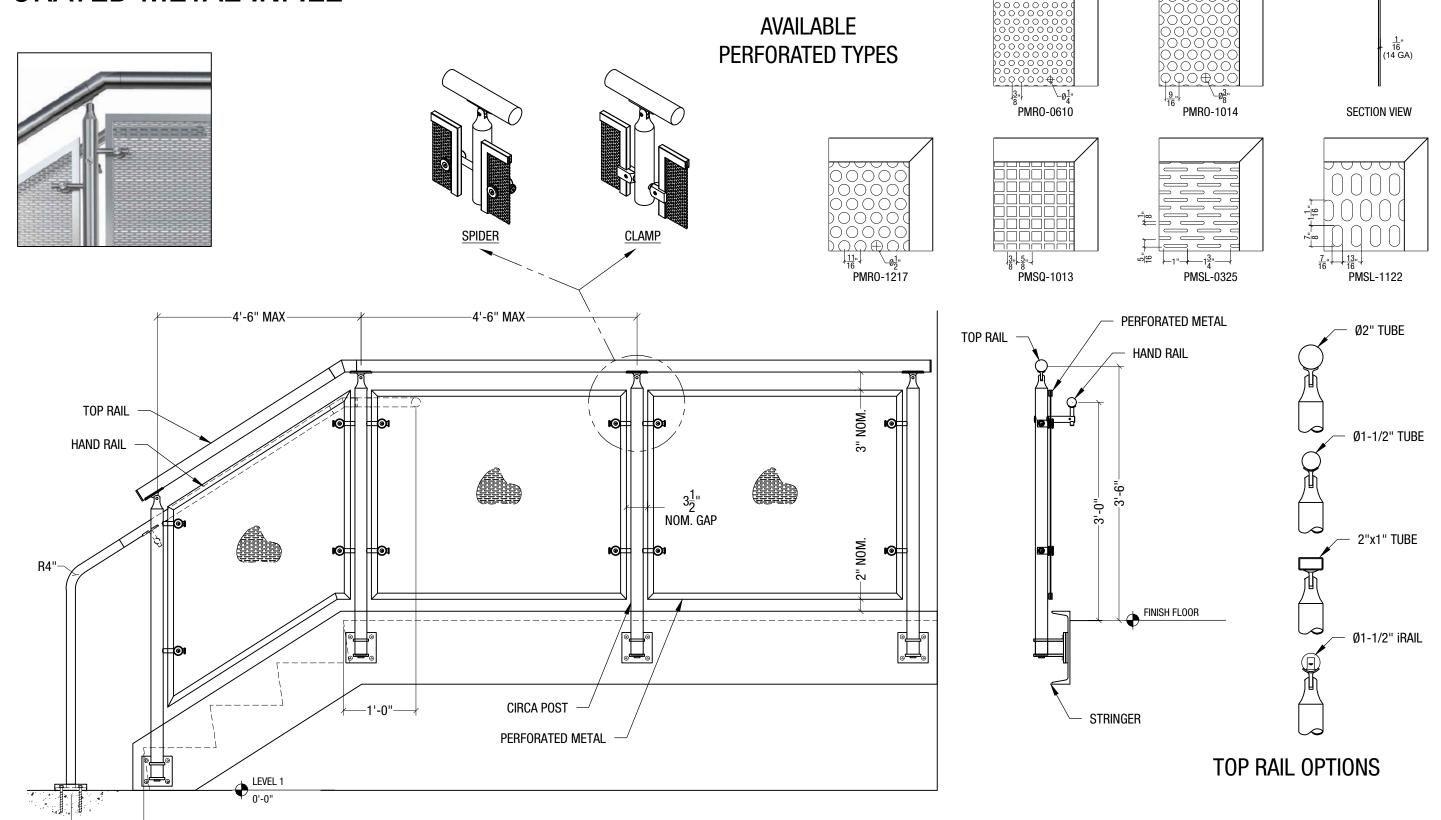













CIRCA RAILING SYSTEM **GLASS INFILL**

├──1'-0''—

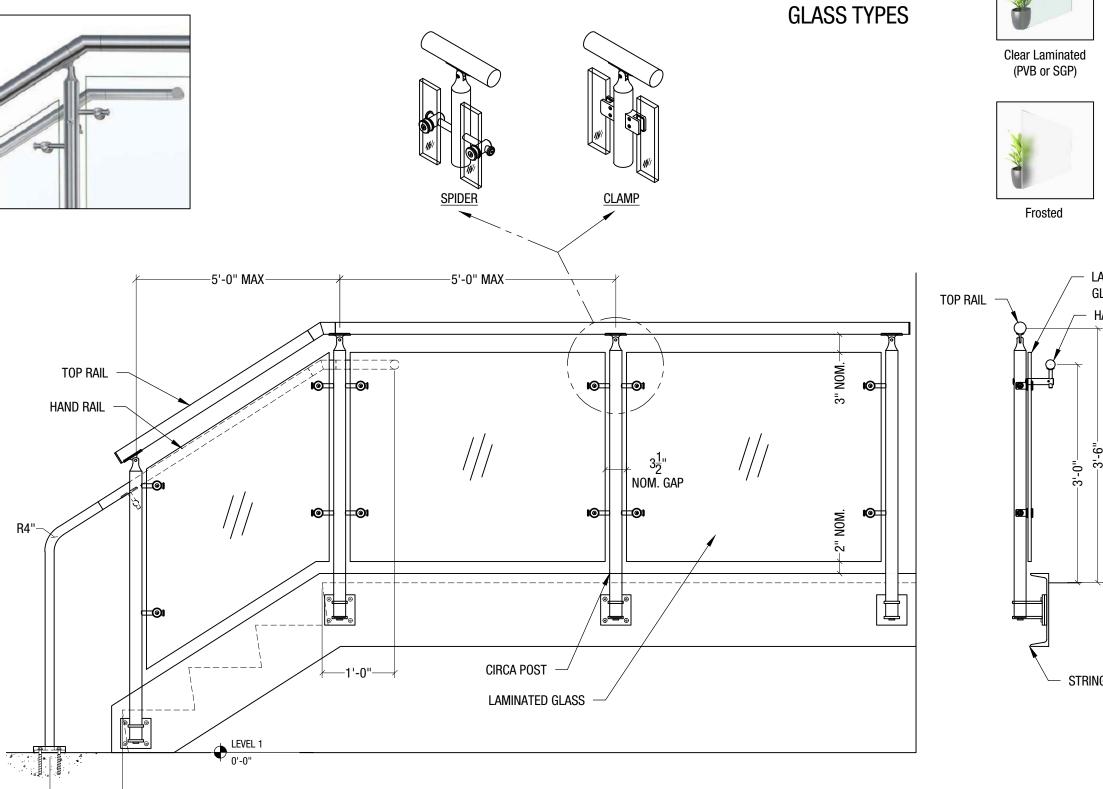







Tinted


Colored Interlayer





Ceramic Frit



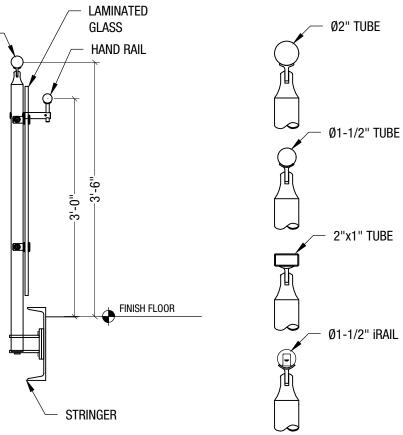

TOP RAIL OPTIONS

VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF ANY BUILDING SYSTEMS OR OTHER MATERIALS NOT FURNISHED BY VIVA RAILINGS. VIVA RAILINGS IS NOT RESPONSIBLE FOR THE STRUCTURALLY SOUND OR DESIGNED TO PROPERLY SUPPORT VIVA RAILINGS'S MATERIALS. ANY SUCH DESIGN RESPONSIBILITY BELONGS TO OTHERS FOR WHOM VIVA RAILINGS IS NOT RESPONSIBLE. THESE DRAWINGS ARE INTENDED FOR THE INSTALLATION OF PRODUCTS FURNISHED BY VIVA RAILINGS. VIVA RAILINGS REMAINS THE SOLE OWNER OF ALL DESIGNS AND INTELLECTUAL PROPERTY












AVAILABLE




CIRCA RAILING SYSTEM PICKET PANEL INFILL

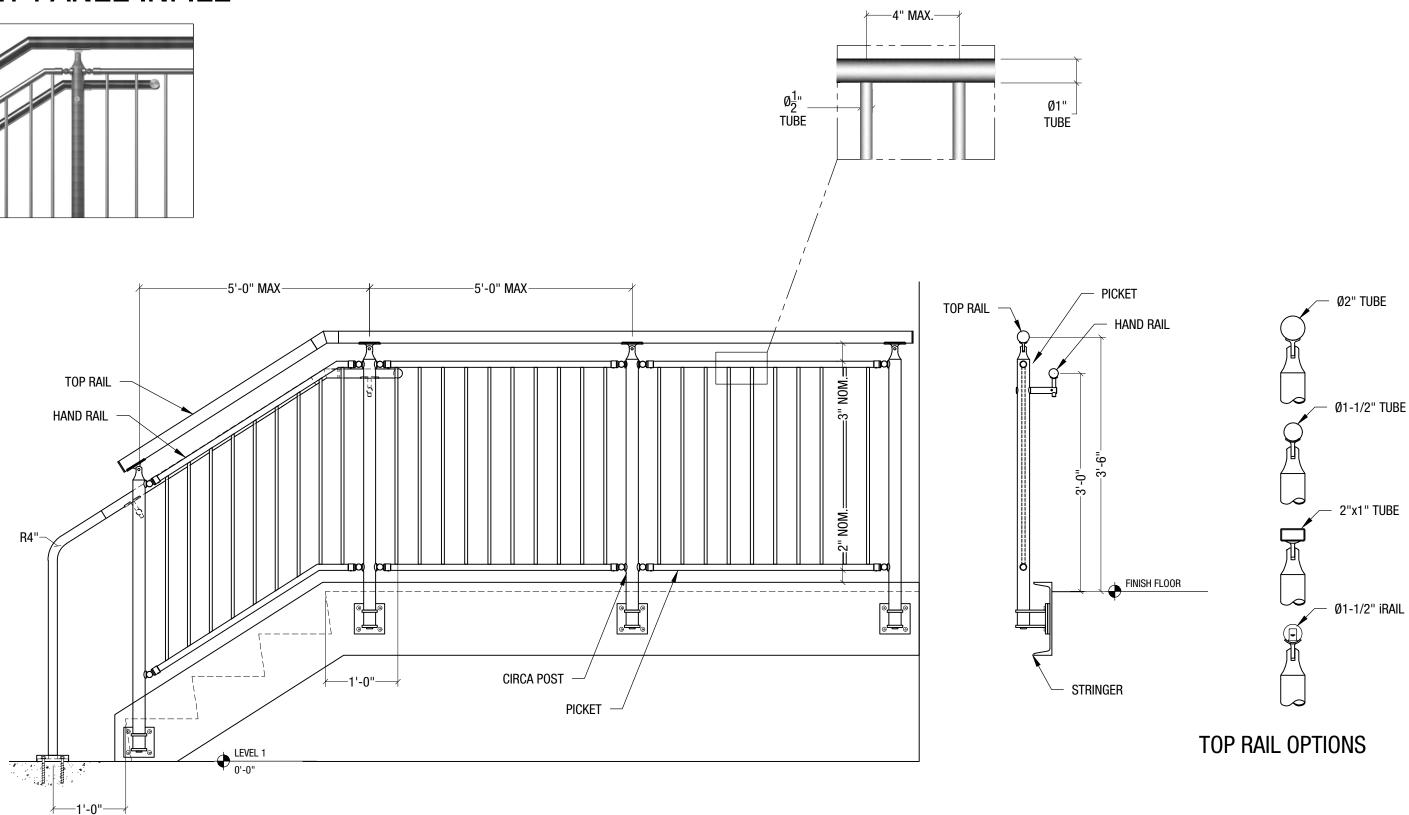














CIRCA RAILING SYSTEM **MULTILINE INFILL**

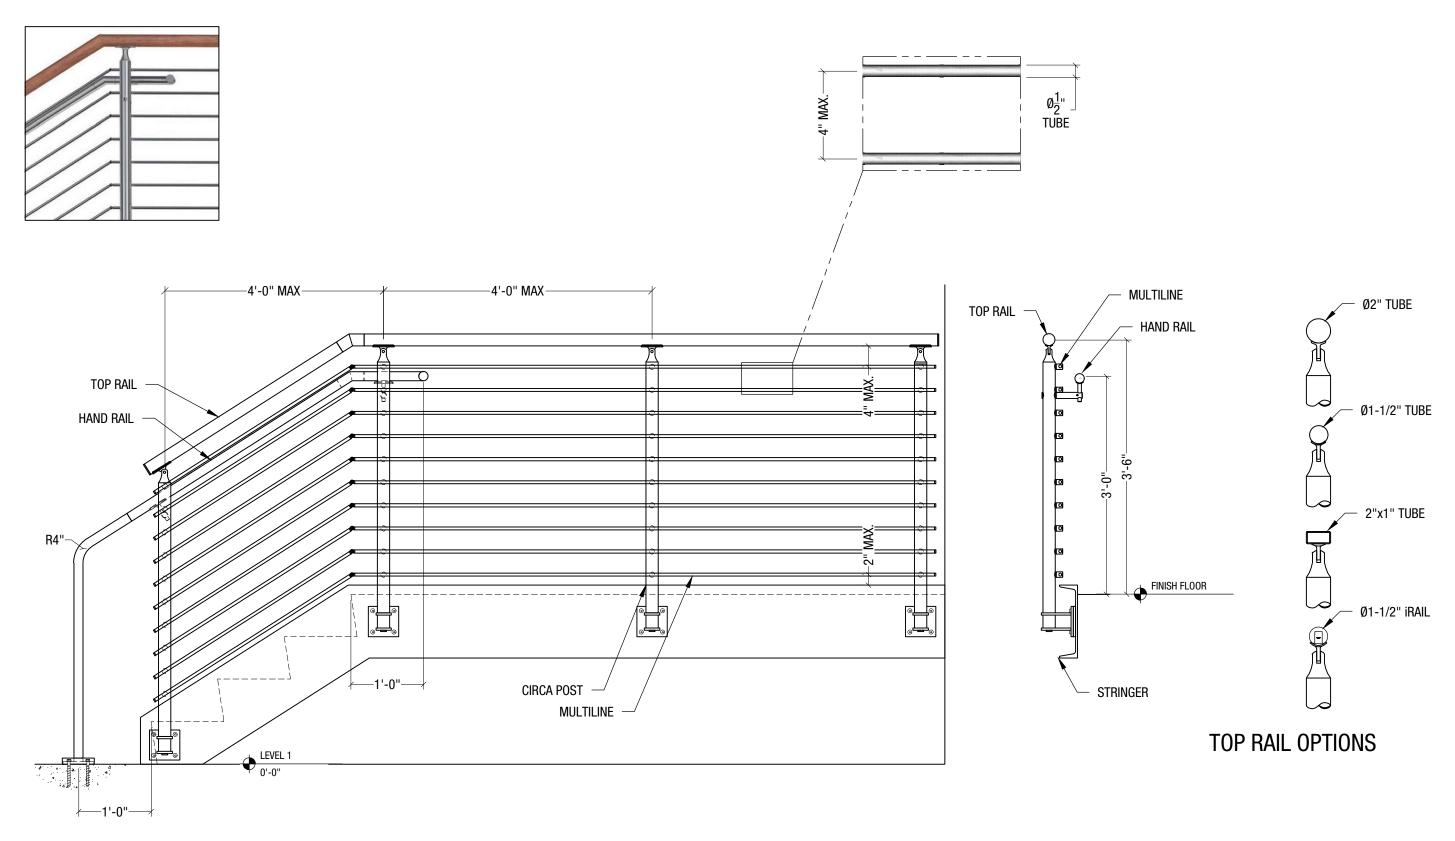

















CIRCA RAILING SYSTEM **CABLENET INFILL**



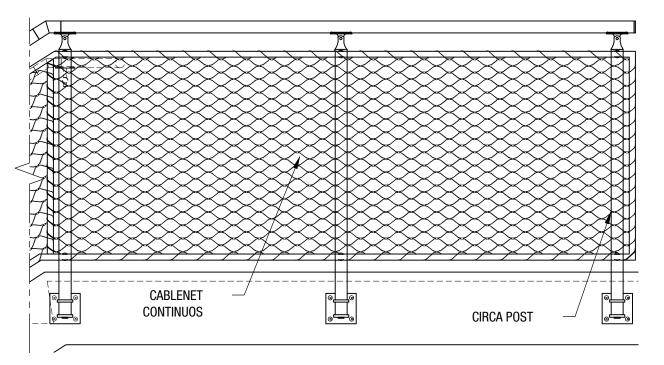


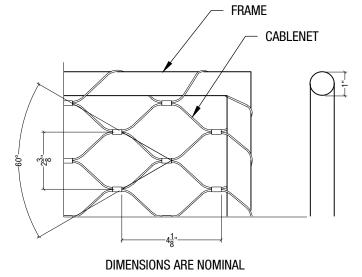


TOP RAIL



7x7 CONSTRUCTION CABLE

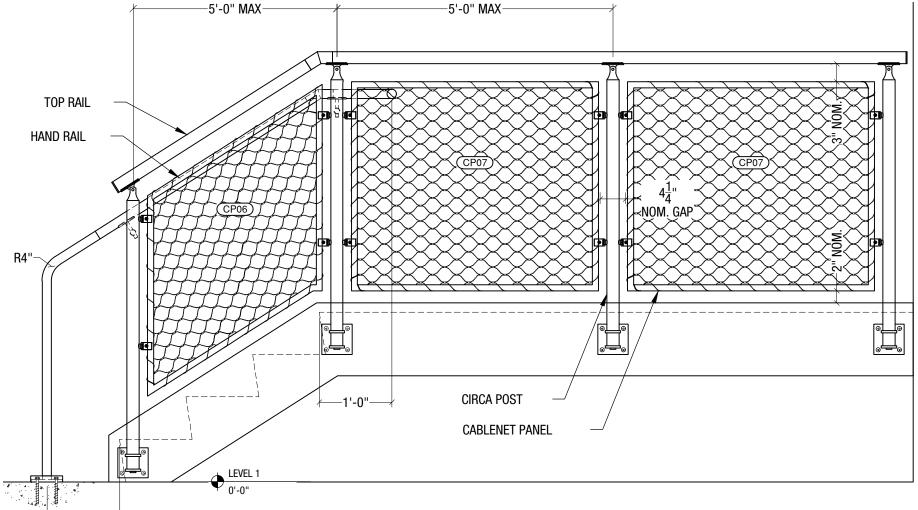


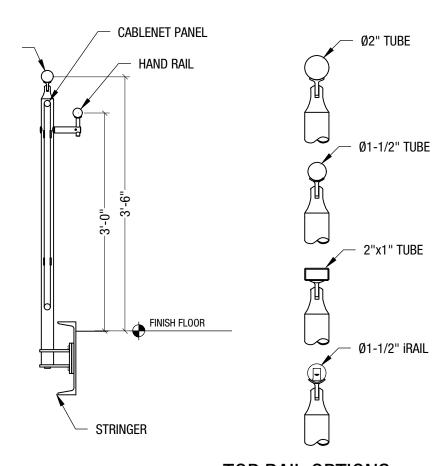



TOP RAIL OPTIONS













CIRCA RAILING SYSTEM **CABLE INFILL**

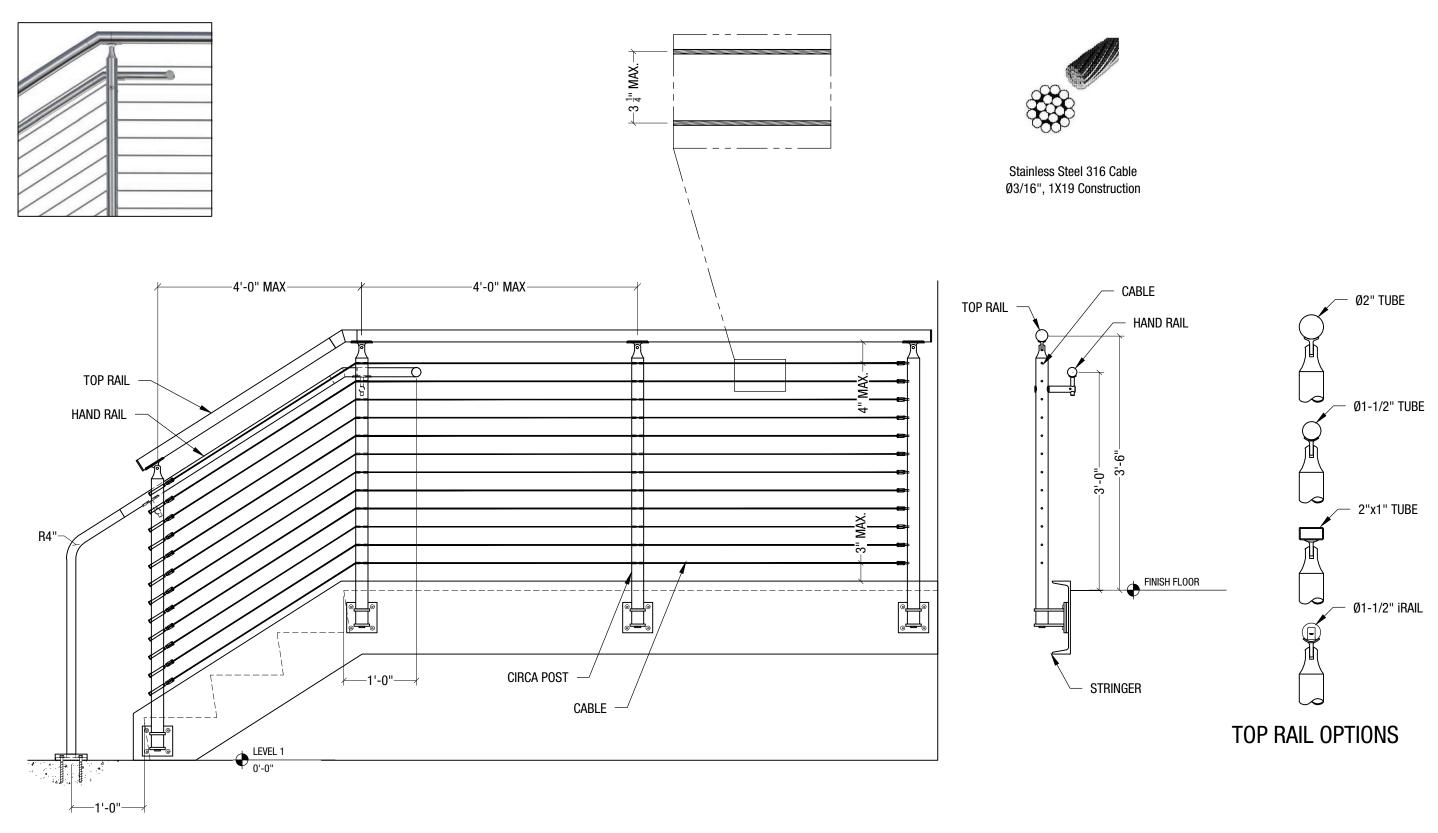




CIRCA RAILING SYSTEM LASER CUT INFILL

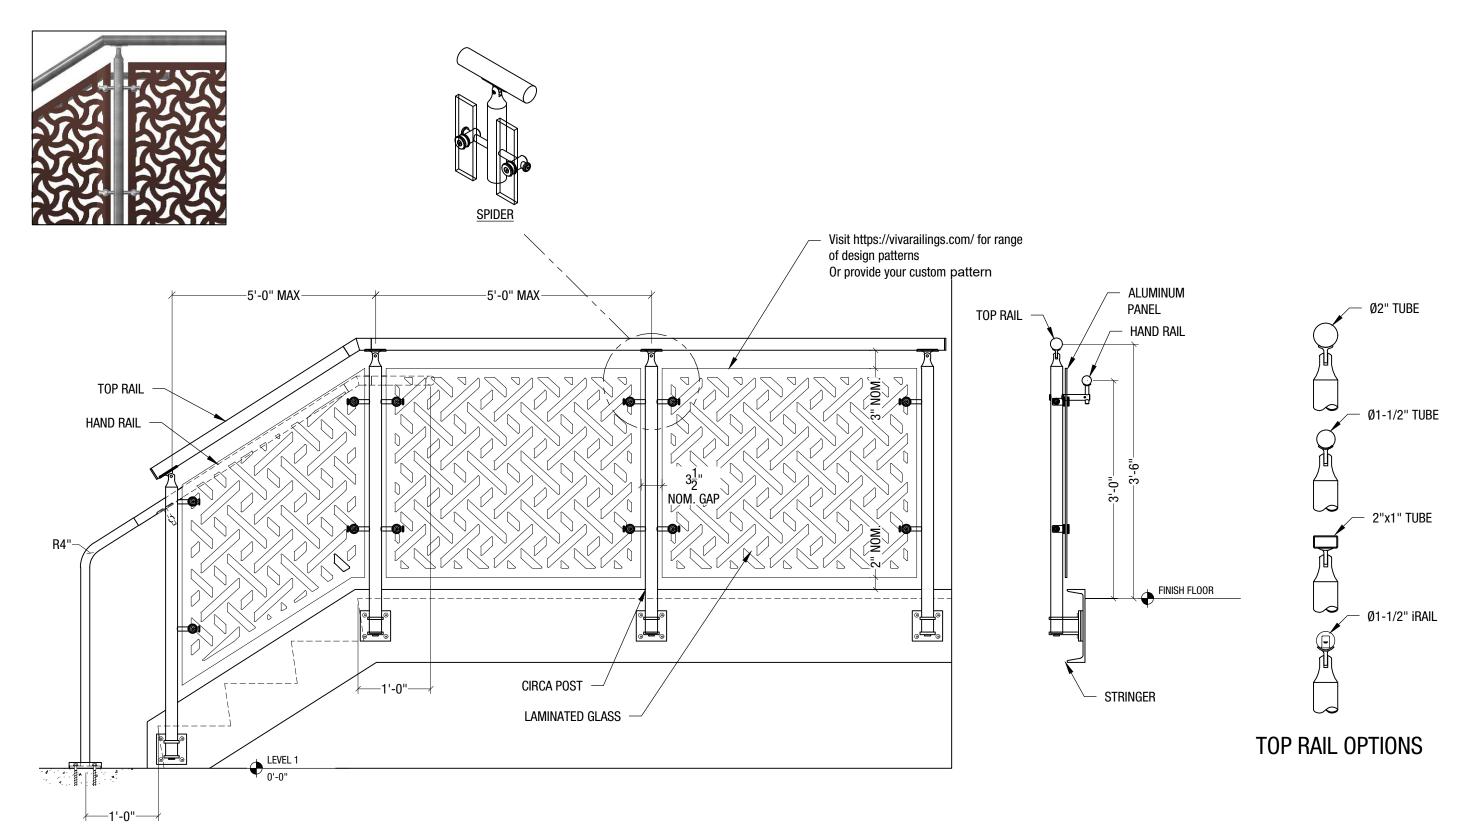














MOUNTING CONDITION, TOP MOUNTED POST

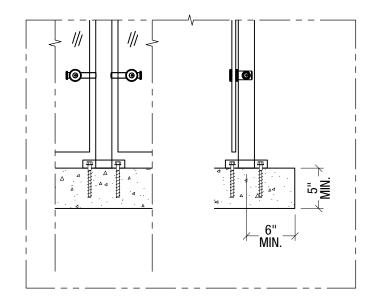


Anchored to Concrete 1 - \$ 2

Detail# CA-T01 3

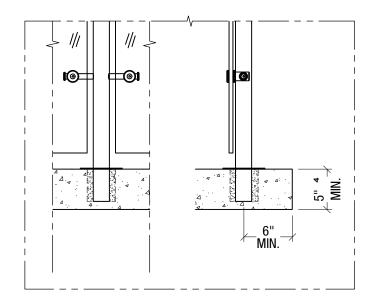


Cored into Concrete - \$\$

Detail# CA-T02

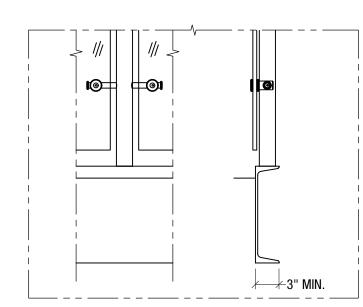

Welded @ Steel Channel - \$


Detail# CA-T03

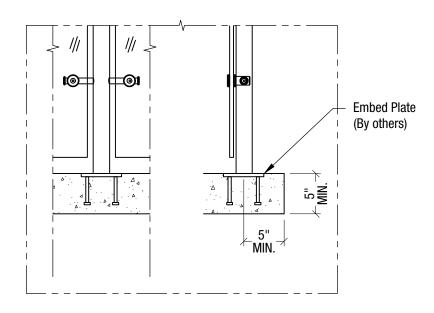

Welded @ Embed Plate - \$

- Detail# CA-T04
- (2) \$ to \$\$\$: Indicates mounting type comparative cost
- (3) Anchoring is not an available option for top mount with cable infill
- (4) $6\frac{1}{2}$ Min. for end post with cable infil

(1) Min. 4000 PSI concrete, Typ.

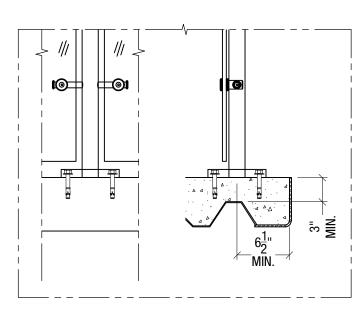


Anchored to Concrete Slab on Deck - \$\$ Detail# CA-T05

3/8" BENT PLATE (BY OTHERS)

Anchored to Concrete Welded to Steel Plate - \$


Detail# CA-T06













MOUNTING CONDITION, FASCIA MOUNTED POST

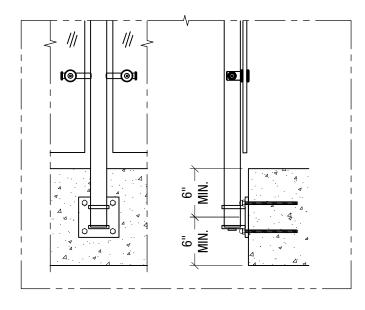


Anchored to Concrete 1 - \$\$\$

Detail# CA-F01²

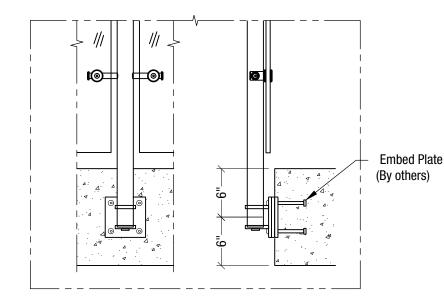


Welded @ Embed Plate - \$\$

Detail# CA-F02

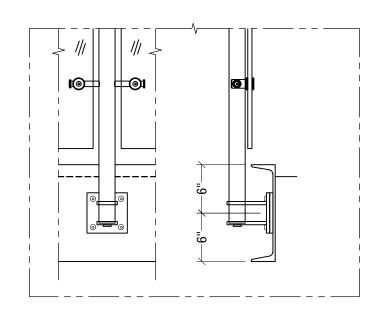


Welded @ Steel Channel - \$\$

Detail# CA-F03

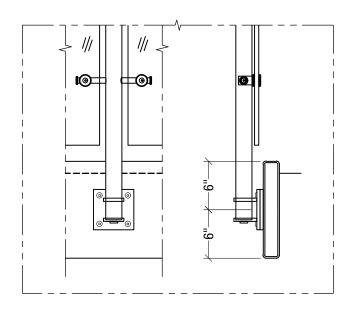

Welded @ Steel Tube - \$\$ Detail# CA-F04

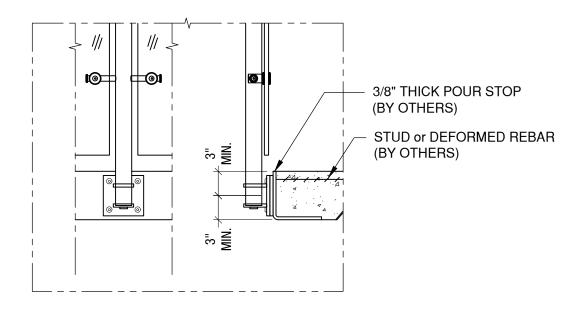

Welded @ Pour Stop - \$\$

Detail# CA-F05












⁽¹⁾ Min. 4000 PSI concrete, Typ.


⁽²⁾ Anchoring is not a recommended option for cable infill


ILLUMINATED RAILING

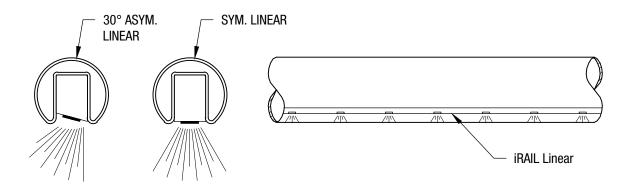

IRAIL LINEAR ORIENTATION OPTIONS

IRAIL POD ORIENTATION OPTIONS

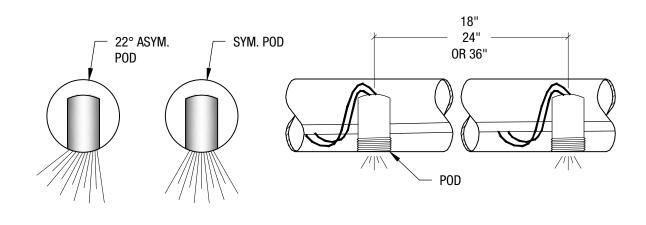

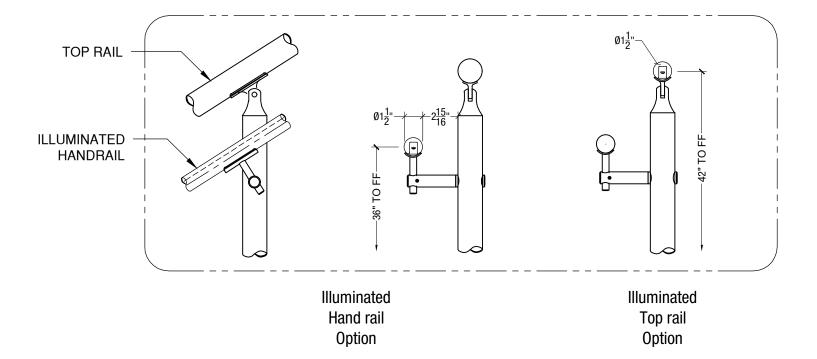


iRAIL LIGHTED RAILING SYSTEM





vivarailings.com

IRAIL POD SPACING OPTIONS


FOLDING DRINK SHELF

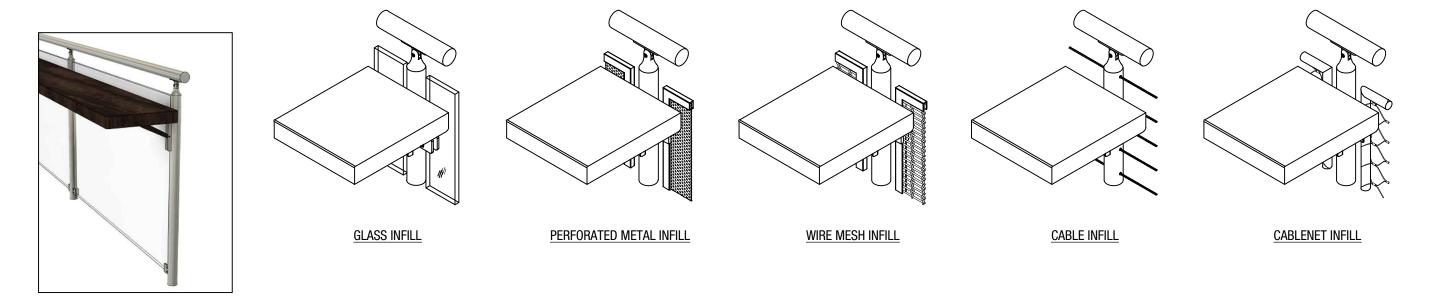


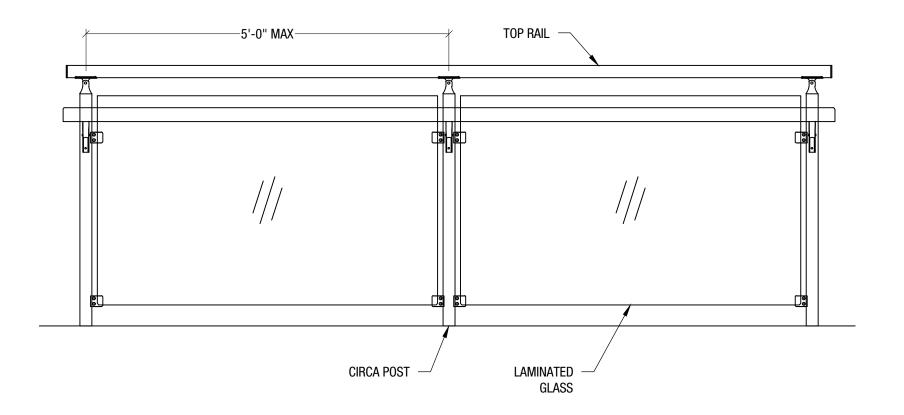

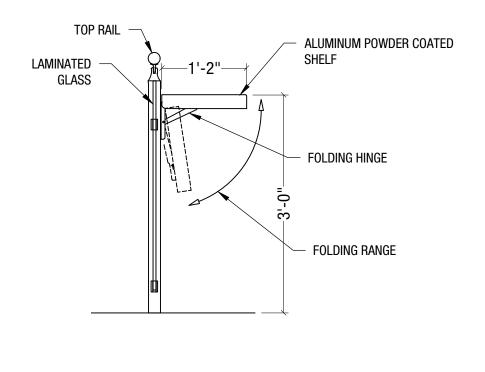







FINISHING OPTIONS

#6 Satin



CeraShield* Ceramic Coating



Enhanced durability and superior protection. Available in a wide range of colors. (Replaces traditional powder coat finish options.)*

VIVA Railings now proudly offers CeraShield Ceramic Coating (powered by CERAKOTE Technology) as our premium finishing option, providing enhanced durability and superior protection for interior and exterior applications. While CeraShield offers unparalleled advantages in hardness, corrosion resistance, UV stability, and chemical resistance, we will continue to offer standard Powder Coat finishes to meet a variety of aesthetic preferences.

Powder Coat



Powder coating is an environmentally-friendly option because it doesn't rely on solvents or chemical carriers. Instead, an electrostatic charge holds the paint to the steel, thus eliminating VOC emissions which will help in regards to LEED requirements. In addition, it meets AAMA specifications. Powder coating is durable and scratch resistant so it weathers and retains its original hue better than conventional liquid coatings.*




POWDER COAT FINISHING OPTIONS

CERASHIELD FINISHING OPTIONS







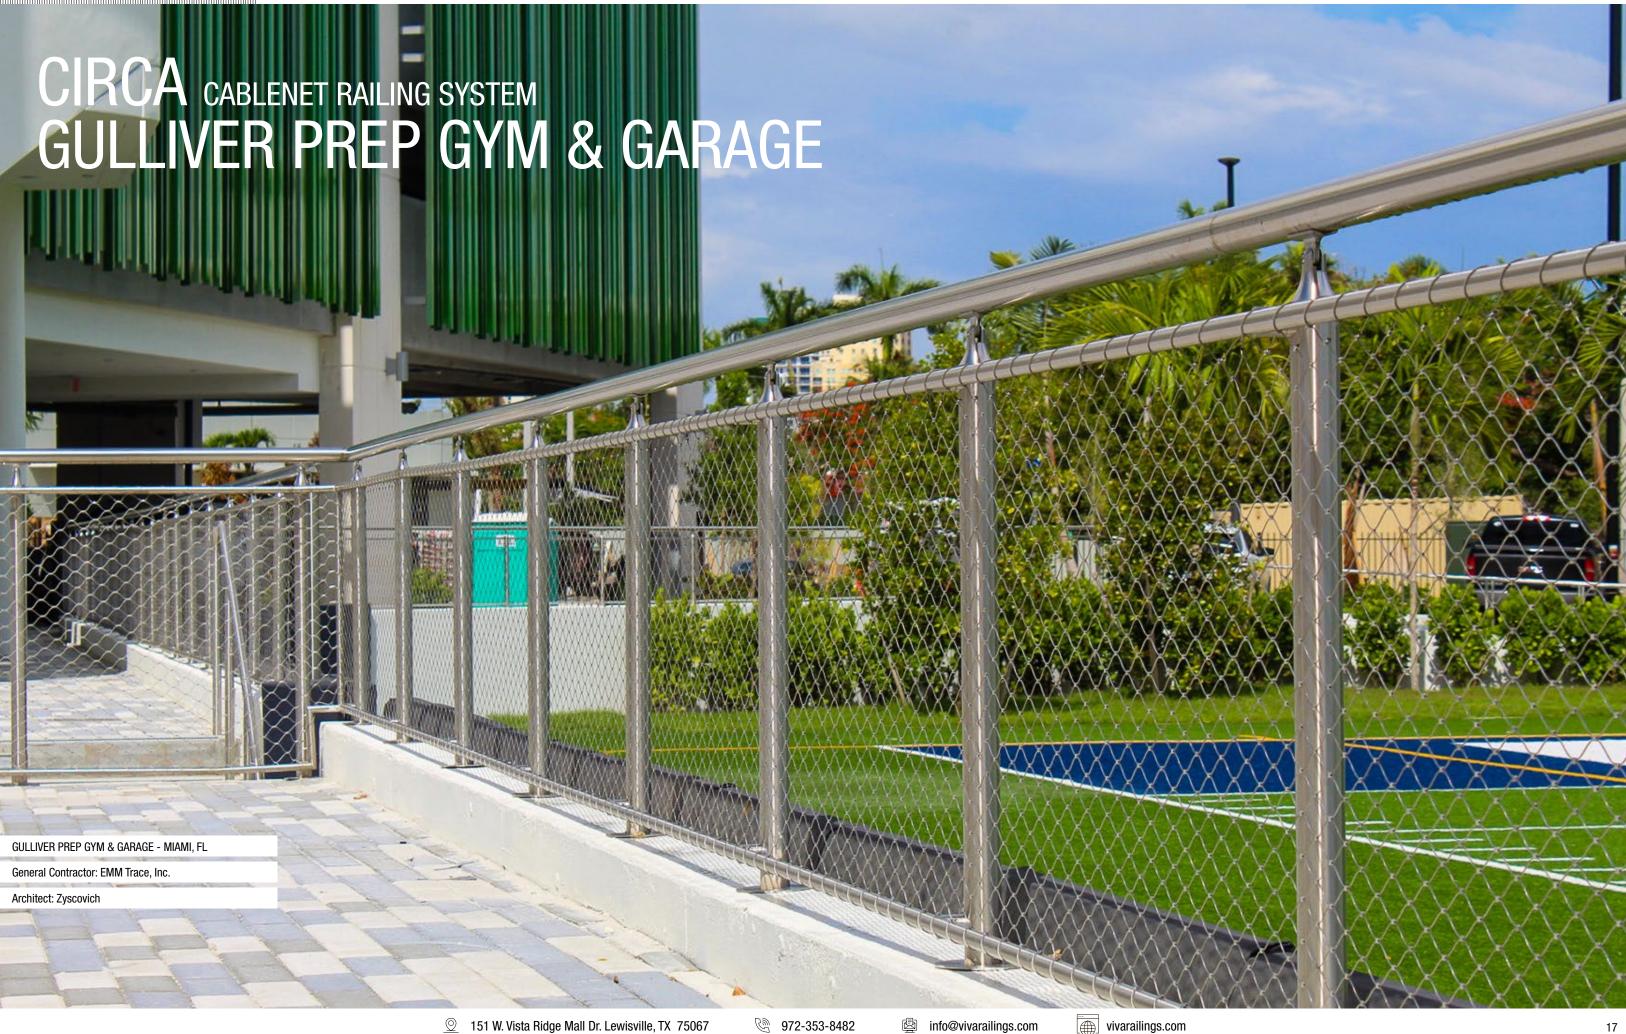











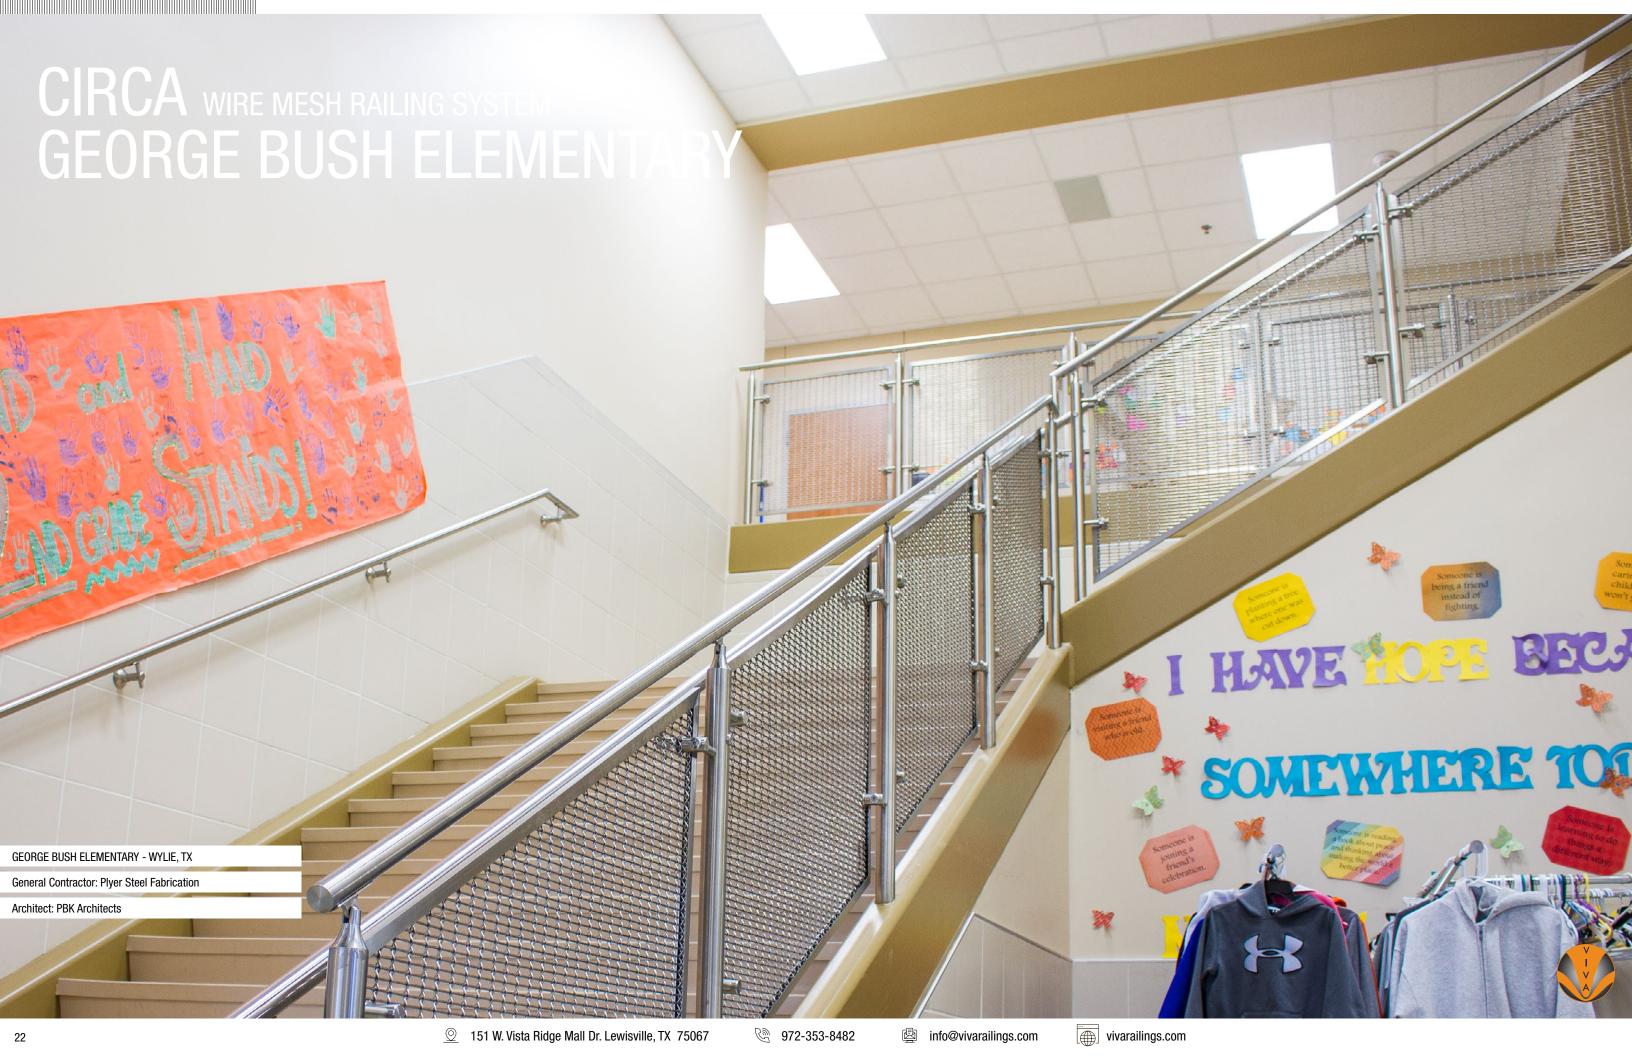

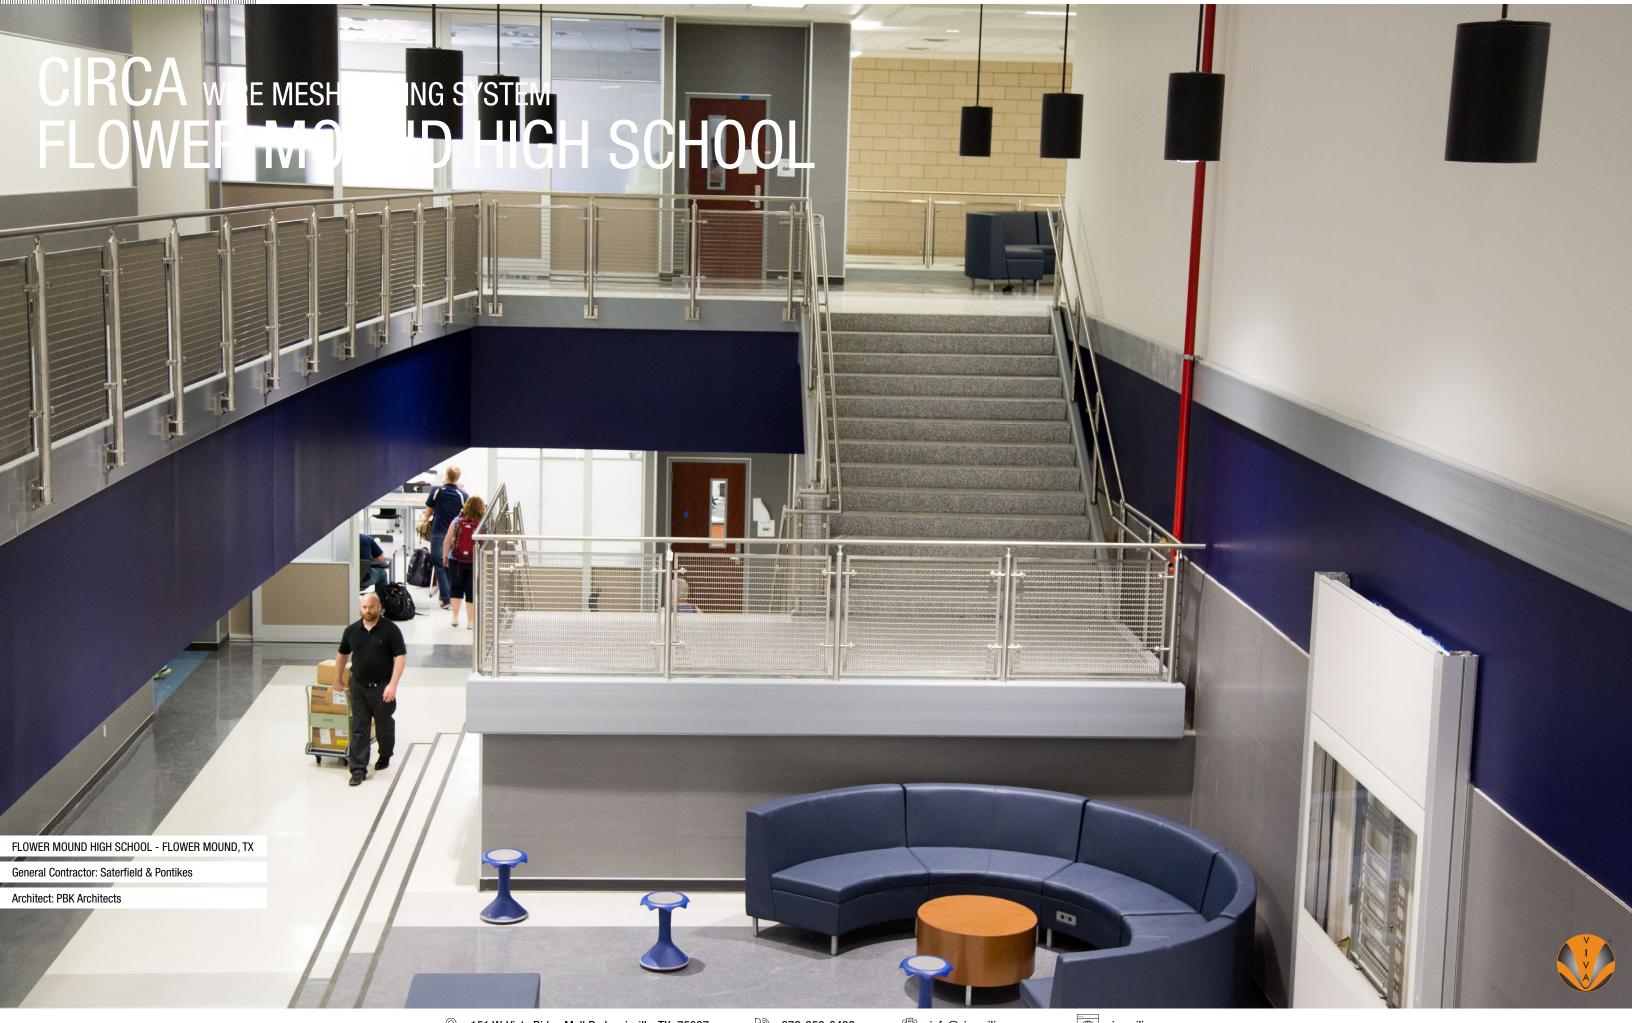



151 W. Vista Ridge Mall Dr. Lewisville, TX 75067

(Dallas/Fort Worth Metroplex)

PH: 972.353.8482 | info@vivarailings.com vivarailings.com



Inc. Magazine 500 | 5000 VIVA RAILINGS, LLC. Among The Fastest Growing US Companies Eight Years in a Row 2012-2019



Inc. Magazine 500 | 5000 VIVA RAILINGS, LLC. Among The Fastest Growing Texas Companies #211



ICC-ES 4405 Certified SH0E™ Structural Glass Railing System



LEED
Material & Resources Credits 4.1 and 4.2



The American Institute of Architects



The California Contractors State License Board Certified